2.50

ANGLE STEEL STOOL CO.

PLAINWELL, MICHIGAN

Please address all communications to
NEW YORK CITY OFFICE



ROLNICK STEEL EQUIPMENT CO.
(ANGLE STEEL STOOL SALES CO.)
N. Y. & N. J. DISTRIBUTORS
98-100 PARK PLACE
NEW YORK
PHONES BARCLAY 7-5559--60

STEEL EQUIPMENT

FOR OFFICE AND FACTORY

TD CAT 1937 Angle..
ATHENAEUM OF PHILADELPHIA

ANGLE STEEL AND SHEET METAL EQUIPMENT

FOR

FACTORY, SHOP and OFFICE

CATALOG E

This Catalog E condenses the principal lines from our old Catalog C and also shows new items, some of which replace equipment shown in our old catalog. If you have an old Catalog C or Catalog M-S retain it in your files as articles shown therein will be built to your order, if desired.

ANGLE STEEL STOOL COMPANY

The Steel Equipment People

Please address all communications to "NEW YORK CITY" OFFICE

PLAINWELL MICHIGAN

REPRESENTATIVES IN ALL PRINCIPAL CITIES

ROLNICK STEEL EQUIPMENT CO.
(ANGLE STEEL STOOL SALES CO.)
N. Y. & N. J. DISTRIBUTORS
98-100 PARK PLACE
NEW YORK
PHONES BARCLAY 7-5559--60

ANGLE STEEL STOOL COMPANY, Plainwell, Michigan, U.S.A.

Permanence in Steel

#24557162 Td Cat 1937
10-14-91
2-27-04

10 Distinctive Features of Angle Steel Stools

Steel Back-rest—Form-fitting; size, 6 x 12 inches.

Spring Steel Uprights that "give" slightly under body pressure.

Hardwood Seat—14 inches in diameter, exceptionally comfortable; firmly attached to steel rim. (Steel seat if preferred our No. 440.)

Cross Bracing—Which prevents any possibility of side sway.

Riveted Construction—Heavily hand-riveted throughout.

Removable Back—Entire back with upright pillars, instantly adjustable and removable.

Finish—Back finished in a rich, dark, olive green enamel. Seat in natural birch unless otherwise specified.

Back Fasteners—By means of these fasteners, entire back can be removed or adjusted in height.

Legs—Made from heavy angle steel; will withstand severe strain.

Ball-Turned Feet—Flared in and made smooth on bottom.

No. 110 Steel Stool with Back
(Same Stool without Back is No. 100)

Permanence in Steel

ANGLE STEEL EQUIPMENT—Economical, Sanitary, Durable

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

All Steel Stools

No. 44 Stool. Without Back, Same Stool is No. 4

No. 44 Stool, with Back

Our leader line of All Steel Stools. Has 13″ dia. concave, 16-gauge pressed steel seat riveted to ¾x¾x⅛″ angle legs. Feet ball turned formed as part of leg. Adjustable steel back; back rest size 6x12″. Even sizes from 16″ to 26″ high. Baked on olive green enamel finish.

No. 4 Stool, without Back

Same as No. 44 illustrated but without the steel back.

No. 4DS Stool, without Back

Our most popular All Steel Stool in heights of 28″ and over. Has 13″ dia. concave, 16-gauge heavy steel seat. Legs ¾x¾x⅛″ angle. 28″ and higher, ⅞x⅞x⅛″ angle legs. Ball feet formed as integral part of leg. Double row of stretchers for perfect rigidity. Even sizes from 24″ to 36″ high. Olive green enamel finish, baked on.



No. 4DS Stool. With Back, Same Stool is No. 44DS.

No. 44DS Stool, with Back

Same as illustrated, but with adjustable steel back rest 6x12″.

No. 55DS Without Back, Same Stool is No. 5DS.

No. 55DS Stool, with Back

Our heaviest pattern Stool. Has 15″ dia. concave, 16-gauge pressed steel seat riveted to 1x1x⅛″ angle legs. Feet flared out and formed as part of leg. Will withstand hardest abuse. Adjustable steel back; back rest 6x14″. Even heights from 18″ to 36″. Baked on olive green enamel finish.

No. 5DS Stool, without Back

Same as illustrated, but without the steel back.

No. 440 Stool, with Back

Our popular selling, durable All Steel Stool. Has 13 dia. concave, 16-gauge pressed steel seat riveted to ¾x¾x⅛″ angle legs. Feet ball turned and formed as part of leg. Cross-braced for rigidity. Adjustable steel back; back rest 6x12″. Even sizes from 16″ to 26″ high. Baked on olive green enamel finish.

No. 40 Stool, without Back

Same as illustrated, but without steel back.

No. 440 Stool. Without Back, Same Stool is No. 40.

No. 440DS Stool. Without Back, Same Stool is No. 40DS.

No. 440DS Stool, with Back

An extremely well built All Steel Stool with double stretchers and cross braces between the bottom row. Has 13″ dia. concave, 16-gauge heavy steel seat. ⅞ x ⅞ x ⅛″ angle steel legs with ball turned feet formed as an integral part. Furnished in even sizes from 24″ to 38″. Adjustable steel back rest 6 x 12″. Olive green enamel finish, baked on.

No. 40DS Stool, without Back

Same as No. 440DS Stool illustrated, but without the steel back.

No. 66 Stool, with Back

This pattern answers the demand for a Three-Legged Stool, which is preferred for some purposes. Has 13″ dia. concave, heavy 16-gauge steel seat, riveted to 1x1x⅛″ angle legs. Feet flared out and formed as a part of the leg. Adjustable steel back rest 6x9″. Even sizes from 18″ to 26″. Also 28″ and 30″ high with double stretchers. Olive green enamel finish, baked on.

No. 6 Stool, without Back

Same as No. 66 illustrated, but without the steel back.



No. 66 Stool. Without Back, Same Stool is No. 6.

ANGLE STEEL STOOL COMPANY, Plainwell, Michigan, U.S.A.

Permanence in Steel

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Steel Stools With Wood Seats

No. 1 Stool.
With Back, Same
Stool is No. 11.

No. 1 Stool, without Back

One of our best-selling stools with steel frame and solid wood seat. Legs of ¾x ¾x⅛" angle, ball turned feet formed as an integral part of the leg. Birchwood seat 14" diam. by 1 1/16" thick. Even sizes from 16" to 26" high. Seat: Natural birch, mahogany, or school brown finish, optional. Steel parts, green enamel finish, baked on.

No. 11 Stool, With Back

Same as illustrated, but with adjustable steel back rest 6x12" mounted on spring steel pillars. Back rest is same as shown on No. 110 stool at the right.

No. 11DS Stool, with Back

This is the stool usually chosen for 28" height and over. Solid birchwood seat, 14" diam. by 1 1/16" thick; natural, mahogany, or school brown finish, optional. Adjustable steel back rest, 6x12". Legs ¾x¾x¼" angle. 28" and higher ⅞x⅞x⅛" angle legs. Ball turned feet formed as an integral part of the leg. Double stretchers insure perfect rigidity. Even sizes from 24" to 36" high. Steel parts, baked on green enamel finish.

No. 1 DS Stool, Without Back

Same as illustrated, but without steel back.

No. 11DS Stool.
Without Back, Same
Stool is No. 1DS.

No. 110 Stool, with Back

A general utility Stool with steel frame and wood seat. Legs of ¾x¾x⅛" angle steel with ball turned feet formed as part of leg. Birchwood seat 14" diam. by 1 1/16" thick, concave. Back rest steel 6x12", adjustable. Even sizes from 18" to 30" high. Finished olive green baked enamel on steel parts: seat in natural, mahogany, or school brown optional.

No. 100 Stool, without Back

Same as illustrated, but without Back assembly.

No. 110 Stool.
Without Back, Same
Stool is No. 100

No. 110-D.S.
Without Back, Same
Stool is No. 100-D.S.

No. 110DS Stool, with Back

A rigid, extra quality Utility Stool. Has 14" diam. by 1 1/16" thick birchwood, concave seat. Steel frame, with ¾x¾x⅛" angle legs. 28" and higher has ⅞x⅞x⅛" angle legs. Ball turned feet formed as part of leg. Adjustable steel back, with back rest 6x12". Finished olive green baked enamel on steel parts and natural birch, mahogany, or school brown on wood seats, optional.

No. 100-DS Stool, without Back

Same as illustrated, but without steel Back.



No. 3TSH Stool

No. 3TSH Extra Heavy Stool

This is an Extra Heavy Pattern Stool designed for especially hard use. Triple stretchers of 3/16x⅞" band steel. ⅞x⅞x ⅛" angle steel legs. Ball turned feet formed as an integral part of the leg. Double riveted throughout. Solid birch wood seat, 14" dia. by 1 1/16" thick. Furnished in even sizes from 28" to 36" high. Seat finished natural birch, mahogany or school brown, optional. Steel parts, green enamel finish, baked on. Can also be supplied with 6x12" adjustable steel back rest if desired. See No. 3 TSB in price list.

No. 328DS Stool, without Back

A very popular stool of rigid construction. Two rows of stretchers with the top one in front left out for leg room. Cross braced between the top row of stretchers. Seat, solid birch wood; natural, mahogany or school brown finish. Legs, ⅞x⅞x⅛" angle with ball feet formed as a part of the leg. Supplied in even sizes from 24" to 36" high. Steel parts, olive green enamel finish, baked on.

No. 428-DS Stool, with Back

Same as No. 328-DS illustrated, but with 6x12" adjustable steel back rest on spring steel pillars.

No. 328-DS Stool.
With Back, Same
Stool is No. 428-DS

YOUR CHOICE OF FINISHES: Wood Seats — Natural Birch, Mahogany, School Brown.
Steel Parts — Olive Green, School Brown.
Wood Backs instead of Steel Backs furnished at slight additional cost — See Price List.

ANGLE STEEL EQUIPMENT—Economical, Sanitary, Durable

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Adjustable-Legged Stools and Chairs

No. 112-W.B. Adjustable-Legged Stool. Without Back Same Stool is No. 102

No. 112-W.B. Stool

An adjustable legged stool of great practical worth. Can be quickly adjusted to varying heights, at one-inch intervals by means of stove bolts on legs. Seat and back rest is of birchwood, form-fitting. Seat is 14″ diam., back rest 6x14″; both finished natural. Heavy steel frame is finished olive green baked enamel. Feet flared out. Adjustable seat heights, 17″ to 25″ and 26″ to 34″.

No. 102 is same Stool without the back.

No. 104 has 13″ diameter Steel Seat.

No. 111-W.B. Stool

This Stool is identical in description to No. 112-W.B. above, except the feet. No. 111-W.B. Stool has ball turned feet, specially formed as part of the angle leg. Leg adjustments on one-inch centers. Adjustable seat heights, 17″ to 25″ and 26″ to 34″.

No. 101 is same Stool without the back.

No. 105 has 13″ diameter Steel Seat.

No. 111-W.B. Adjustable-Legged Stool. Without Back, Same Stool is No. 101.

No. 111-S.W.B. Chairs

No. 111-S.W.B. Chair

An adjustable-legged Chair; the height adjustment accomplished by stove bolts on the legs. Has a comfortable saddle-shaped seat, birchwood, $14\frac{1}{2}$x$14\frac{1}{2}$″ square by $1\frac{1}{16}$″ thick. Back rest is 6x14″ size, curved, birchwood. Seat and back rest finished natural. Steel frame and parts finished olive green baked enamel. Ball turned feet formed as part of legs. Adjustable seat heights, 17″ to 25″ and 26″ to 34″.

No. 112-S.W.B. is same Chair with feet flared outward.

No. A 112-W.B. Stool

This Adjustable legged stool is the same as No. 112-W.B., at left, except for the new Completely Adjustable Back Rest. 6″x14″ curved birchwood back is quickly adjusted vertically and horizontally in relation to the seat to suit the individual user. Seat and back rest finished natural, frame olive green baked enamel. Flared out feet formed as part of the leg. Adjustable seat heights, 17″ to 25″ and 26″ to 34″.

No. A 112-W.B. (Rear View)

~~No. A112-W.B. (Rear View)~~

No. A 111-W.B. Adjustable-Legged Stool

No. A 111-W.B. Stool

This pattern is the same as No. A 112-W.B. above, except the feet are ball turned, formed as an integral part of the leg. 6x14″ Completely Adjustable Back Rest and 14x$1\frac{1}{16}$″ birchwood seat, finished natural. Steel frame finished olive green baked enamel. Adjustable seat heights, 17″ to 25″ and 26″ to 34″.

No. A 112-S.W.B. Chair

Adjustable-legged Chair with same Completely Adjustable back rest as shown on No. A 112-W.B., above. Comfortable birchwood saddle seat, $14\frac{1}{2}$x$14\frac{1}{2}$x$1\frac{1}{16}$″ thick. 6x14″ curved birchwood back rest. Seat and back rest finished natural. Steel frame finished olive green baked enamel. Flared out feet formed as an integral part of the leg. Adjustable seat heights, 17″ to 25″ and 26″ to 34″.

No. A 111-S.W.B. is same chair with ball turned feet.

No. A 112-S.W.B. Adjustable-Legged Chair

ROLNICK STEEL EQUIPMENT CO.
(ANGLE STEEL STOOL SALES CO.)
N. Y. & N. J. DISTRIBUTORS
98-100 PARK PLACE
NEW YORK
PHONES BARCLAY 7-5559--60

YOUR CHOICE OF FINISHES: Wood Seats — Natural Birch, Mahogany, School Brown. Steel Parts — Olive Green, School Brown.

ANGLE STEEL STOOL COMPANY, Plainwell, Michigan, U.S.A.

Permanence in Steel

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Posture Chairs

No. 276 L.C.-PVR

No. 276L.C.-PVR Posture Chair

This Posture Chair has a Revolving Seat and is Adjustable in Height. Seat height is instantly adjustable by means of a handwheel underneath the seat. Seat is adjustable forward and backward in relation to the back rest. Back rest adjustable up and down and for tilt by means of one handwheel. Seat and back rest padded with curled hair and upholstered with genuine leather. Mounted on 2" dia. Baco, rubber wheeled, swivel casters. Choice of leather colors: Green, light walnut brown or dark mahogany brown. Choice of color on steel parts: Green, light brown or dark brown. Adjustable heights: 14" to 19", 17" to 22", and 20" to 25". Green leather, green frames, and 17" to 22" height will be supplied if not otherwise specified.

No. 271 R.C.B. Posture Chair

New Economy Posture Chair for the office. This chair has the same rugged frame as the No. 276L.C.-PVR shown opposite. Seat height instantly adjusted by handwheel underneath seat. Five-ply roll front veneer seat, adjustable forward and back in relation to the back rest. Five-ply curved veneer back rest adjustable up and down by one handwheel. Mounted on 2" dia. Baco, rubber wheeled casters. Seat and back rest finished natural birch. Frame olive green baked enamel finish. Adjustable heights, 14" to 19", 17" to 22", and 20" to 25".

No. 271R—Same as above except with ball feet instead of casters.

No. 271 R.C.B. Posture Chair

No. 280 Posture Chair

Here is an Economical Factory Posture Chair. Solid birch wood seat, 16" wide by 12" deep by $1\frac{1}{16}$" thick, with depressed center. Seat adjustable forward and backward in relation to back rest. Back rest, birch face plywood, 13" wide by 5" high. Back rest instantly adjustable for height and tilt by one handwheel. Seat and back rest finished natural birch; steel frame, olive green enamel, baked on. Seat height adjustable, 14" to 19", 17" to 22", or 20" to 25". Also furnished with casters — see price List.

No. 280 Posture Chair

No. 281R.C.B.

No. 281 R.C.B. Posture Chair

New Economy Posture Chair for the factory. Has the same rugged frame construction as No. 280 shown opposite. Five-ply roll front veneer seat, adjustable forward and backward in relation to the back rest. Five-ply curved veneer back rest adjustable up and down by one handwheel. Mounted on 2" dia. Baco, rubber wheeled casters. Seat and back rest finished natural birch. Frame olive green baked enamel finish. Adjustable seat heights, 14" to 19", 17" to 22", and 20" to 25".

No. 281R—Same as above except without casters.

No. 20 L.C. Office and Desk Chair

No. 20L.C. Office and Desk Chair

All Steel Office and Desk Chair with genuine leather upholstered seat and back rest. Comfortable seat, 18" wide by 16" deep front to back. Large back rest, 17½" wide by 12" high. Baco, rubber wheeled. 2" dia. swivel casters. Choice of leather colors: Green, light brown or dark brown. Choice of color on steel parts: Green, light brown or dark brown. Green leather and green frames supplied if not otherwise specified. Adjustable seat height. 17" to 22".

No. 277L-PVR Posture Chair

High Revolving Seat Posture Chair. The adjusting features of this chair are exactly like the No. 276L.C.-P.V.R. shown on this page. Ring type channel foot rest 17" below seat. Seat and back rest padded with curled hair and upholstered with genuine leather. Choice of leather colors: Green, light walnut brown or dark mahogany brown. Steel parts: Green, light brown or dark brown. Adjustable seat height, 30" to 35". Green leather and green frames supplied if not otherwise specified.

No. 277L-PVR

ANGLE STEEL EQUIPMENT—Economical, Sanitary, Durable

Permanence in Steel

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Revolving Stools

No. 35-B Revolving and Adjustable Stool. Without back same Stool is No. 25.

No. 35-B Stool, with Back

Adjustable height Revolving Stool. Solid birchwood seat, 14″ dia. by $1\frac{1}{16}$″ thick. Curved wood back rest, 6″ x 14″. Rigid frame with one row stretchers. Angle steel legs with ball turned feet formed as an integral part of the leg. Quickly adjusted to desired height by use of handwheel underneath seat. Wood parts, natural, mahogany or school brown finish, optional. Steel parts, baked on green enamel. Adjustable seat heights, 18″ to 23″, 22″ to 27″, and 26″ to 31″.

No. 25 Revolving Stool, without Back

Same as illustrated, but without back rest.

No. 35DSB Revolving Stool

Tall adjustable height Revolving Stool. Solid birchwood seat, 14″ dia. by $1\frac{1}{16}$″ thick. Curved wood back rest, 6″ x 14″, on spring steel pillars. Double stretchers for extra rigidity. ⅞″ x ⅞″ x ⅛″ angle legs with ball turned feet formed as an integral part of the leg. Quickly adjusted to desired height by use of handwheel under seat. Wood parts, natural birch, mahogany or school brown finish. Steel parts olive green enamel baked on. Adjustable seat heights, 26″ to 31″, 30″ to 35″, and 34″ to 39″.

No. 25DS Revolving Stool, without Back

Same as No. 35DSB illustrated, but without back rest.

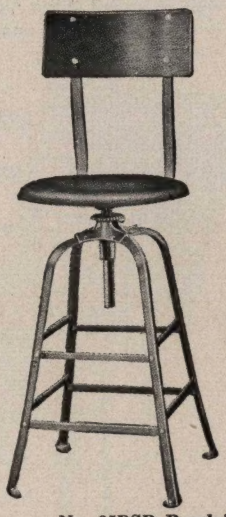

No. 35DSB Revolving and Adjustable Stool. Same Stool without Back is No. 25DS.

No. 250DS Revolving Stool, and No. 99 Foot Rest

No. 250DS Revolving Stool and No. 99 Foot Rest

No. 250DS Revolving Stool has the top stretcher at front left out for leg room. 14″ dia. by $1\frac{1}{16}$″ thick solid birchwood seat, finished natural, mahogany or school brown, optional. Quickly adjusted to desired height by handwheel under seat. Adjustable seat height, 26″ to 31″, 30″ to 35″, and 34″ to 39″.

No. 350DSB Revolving Stool, with Back

Same as above stool, but with 6″x14″ birchwood back rest.

No. 99 Foot Rest

Can be supplied for any of our revolving or non-adjustable stools at slight cost — see Price List. Illustration shows it on No. 250DS pattern stool.

Drafting Room Stools

No. 251 Stool

A Revolving and Adjustable seat Stool with channel foot rest. Seat is adjustable 5″ in height by means of handwheel beneath seat. Heavy steel frame, with ball turned feet formed as part of leg. Channel foot rest 19½″ dia. and set 17″ below seat. Seat is 14″ dia. by $1\frac{1}{16}$″ thick, birchwood, concave, finished natural. Steel parts finished in olive green enamel, baked on. Adjustable seat heights, 26″ to 31″, 30″ to 35″, and 34″ to 39″.

No. 252, same Stool with curved hardwood back rest mounted on spring steel pillars.

No. 251 Stool

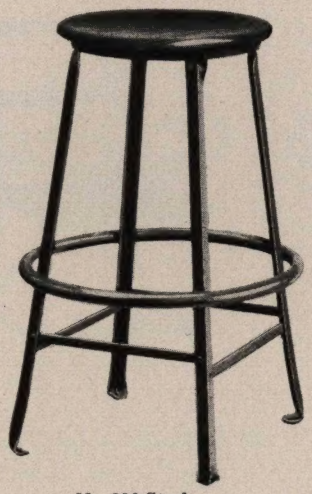

No. 226 Stool

No. 226 Stool

A Stationary Stool, durable and low priced, especially designed for draftsmen, bookkeepers, and clerks. Has 14″ dia. by $1\frac{1}{16}$″ thick birchwood concave seat finished natural. Heavy steel frame finished in baked on olive green enamel. Ball turned steel feet. Channel foot rest is 19½″ dia. and set 17″ below seat. Even sizes from 26″ to 36″ high.

No. 227, same Stool with wood back rest mounted on spring steel pillars.

No. 256 Revolving Chair

A most comfortable utility Office Chair. Has 14½x14½x$1\frac{1}{16}$″ thick saddle birchwood seat with curved wood back rest. Entire seat and back assembly is revolving type, with seat adjustable up and down. Steel frame finished olive green baked enamel; seat and back rest in natural birch, mahogany or school brown. Adjustable seat heights, 18″ to 23″, 22″ to 27″ and 26″ to 31″.

No. 256

YOUR CHOICE OF FINISHES: Wood Seats — Natural Birch, Mahogany, School Brown. Steel Parts — Olive Green, School Brown.

ANGLE STEEL STOOL COMPANY, Plainwell, Michigan, U.S.A.

Permanence in Steel

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Chairs

No. 1018

No. 1018 Chair

The most popular, all-around Chair for factory use. Sturdily built to withstand abuse and hard service. Has 14½" x 14½" x 1 1/16" saddle, birchwood seat, finished natural. All-steel frame is riveted throughout and well braced. Finished in olive green enamel, baked on. Ball turned feet formed as part of the leg. Furnished in even sizes from 16" to 26" high.

No. 1018WB Chair

Same as above, but with a birchwood back rest, 6" x 14", in place of the two back slats at the top. Back finished to match the seat.

No. 2016 Chair

Same as No. 1018WB, but seat and back padded and upholstered with genuine leather. Choice of leather colors: Green, light brown, or dark brown. Green leather and green frames are furnished if not otherwise specified.

No. 3016 Chair

Same as No. 1018 described above, but with 16-gauge, flat perforated steel seat.

No. 018 Chair

A well built Chair for all general purposes. Slightly lighter in construction than the No. 1018 style. Birchwood saddle seat, 14½"x14½"x 1 1/16", finished natural. All-steel frame with double slat steel back rest attached to continuous posts. Ball turned feet are an integral part of the leg. Sizes: 16", 18", or 20" high. Olive green enamel, baked on finish frames.

No. 018 Chair

No. 1112WB

No. 1112WB Kindergarten Chair

A rugged steel Chair for small children. Birchwood seat, 12" wide by 10½" deep by ⅞" thick. Two-piece birchwood back rest 11" wide. Top slat 2¾" high, bottom slat 1¾" high. Legs and continuous back posts of ¾" x ¾" x ⅛" angle. Ball feet formed as a part of the leg. Wood parts finished natural birch or school brown; frames, green or school brown, optional. Sizes: 12", 13" or 14" high.

Also furnished with one-piece wood back, No. 1112.

Tablet Arm Chairs

No. 1800 Tablet Arm Chair

Steel Tablet Arm Chair with solid birchwood seat and arm. Saddle seat 14½" by 14½" by 1 1/16" thick. Heavy arm 9" wide by 23" long by 1 1/16" thick. Legs and continuous back posts ⅞" x ⅞" x ⅛" angle. Ball turned feet formed as an integral part of the leg. Three-piece steel back rest. Book or hat rack, steel slat type as shown or solid sheet steel. Seat height, 18", 17" or 16". Top of arm 8½" above seat. Wood seat and arm finished natural birch or school brown; steel frame, green or school brown, optional.

No. 1800 Tablet Arm Chair

No. 1750 Tablet Arm Chair

Steel Tablet Arm Chair with solid birchwood seat and arm. Saddle seat 14½" by 14½" by 1 1/16" thick. Heavy birchwood arm, 12¼" wide by 27" long by 1 1/16" thick. Seat and arm finished natural birch or school brown, optional. Three-piece back rest riveted to continuous back posts. Legs ⅞"x⅞"x⅛" angle with ball feet formed as an integral part of the leg. Frames finished olive green or school brown. Seat height, 18", 17" or 16". Top of arm 8½" above seat.

No. 1750 Tablet Arm Chair

No. 1700 Tablet Arm Chair

Sturdy Tablet Arm Chair with solid birchwood seat, arm and back rest. Saddle seat 14½" by 14½" by 1 1/16" thick. Heavy arm, 12¼" wide by 27" long by 1 1/16" thick. Two-piece back rest, 14" wide, top slat 6" high, bottom slat 3" high. Legs and continuous back posts, ⅞" x ⅞" x ⅛" angle. Ball feet formed as part of the leg. Top of arm 8½" above seat. Wood parts, natural birch or school brown finish; steel frame, olive green or school brown, optional. Seat height, 18", 17" or 16".

No. 1700 Tablet Arm Chair

YOUR CHOICE OF FINISHES: Wood Seats — Natural Birch, Mahogany, School Brown. Steel Parts — Olive Green, School Brown.

Permanence in Steel

ANGLE STEEL EQUIPMENT—Economical, Sanitary, Durable

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Miscellaneous Seating

No. 7DT

No. 7DT Stool

This stool provides a convenient means of keeping tools or parts ready at hand. 14″ dia. by 1 1/16″ birchwood seat, natural finish. Heavy angle legs with one row of stretchers. 20-gauge pan, 11½″ by 12″, with turned-up edges. Steel drawer 7″ wide, 10″ deep, 6″ high. Even sizes from 18″ to 24″ high. Steel parts, olive green enamel, baked on.

No. 7D Stool

Same as illustrated with drawer, but without tray.

No. 7T Stool

Same as illustrated with tray, but without drawer.

No. 213 Filing Stool

Filing Stools have proven to be very convenient around the office and work room. This stool equipped with 2″ dia. steel or Baco rubber wheeled casters is a real time saver. Comfortable birchwood seat, 14″ dia. by 1 1/16″ thick, finished natural, mahogany or school brown. Heavy angle legs and frame finished green or brown. Regularly furnished 12″ or 14″ high, other sizes quoted upon request. Supplied with natural birch seat and olive green enamel, baked on frames if not otherwise specified.

No. 213 Filing Stool

No. 15-19

An Adjustable Linotype Operator's Chair. Seat height adjustable 13″ to 19″. Hardwood saddle seat size, 17½″ wide by 15½″ deep. Has adjustable tilt so that rear of seat may be adjusted 2″ to 4″ lower than front edge. Back is curved sheet steel, perforated. Angle steel frame well braced. Seat finished natural birch, steel parts olive green baked enamel. Shipped set up.

No. 15-19 Linotype Operator's Chair

No. 13-F Counter Stool

No. 13-F Counter Stool

A single standard Stool with revolving, non-adjustable seat. Seat is of birchwood, 14″ dia. by 1 1/16″ thick, concave. Standard 1½″ outside dia. pipe attached to solid floor flange base. Special heavy band steel foot rest. Steel parts finished in olive green enamel or brown. Wood seat finish in natural birch, mahogany or school brown, optional. Green frames and natural birch seats unless otherwise specified. Even sizes 20″ to 30″ high.

No. 13 Counter Stool

Same as above, but without foot rest.

No. 19-15 Linotype Operator's Chair

No. 19-15

Built to be especially adaptable to a Linotype Operator's work. Large seat, 17½″ wide by 15½″ deep, hardwood, saddle shape. Seat is 16″ high from floor at front and 15″ at rear. Back is curved sheet steel perforated. Angle steel frame well braced. Seat finished natural birch, steel parts olive green baked enamel. Shipped set up.

No. 27-WB Combination Stool and Chair

This stool has a fixed back and answers the requirements for either a stool or chair. Birchwood seat, 14″ dia. by 1 1/16″ thick. Birchwood back rest 13″ wide by 6″ high. Steel frame extremely rugged and well braced. Ball turned feet are formed as an integral part of the leg. Even sizes from 16″ to 30″ high. Wood parts finished natural birch, mahogany or school brown. Steel parts, green or school brown. Natural birch with green frames will be supplied if not otherwise specified.

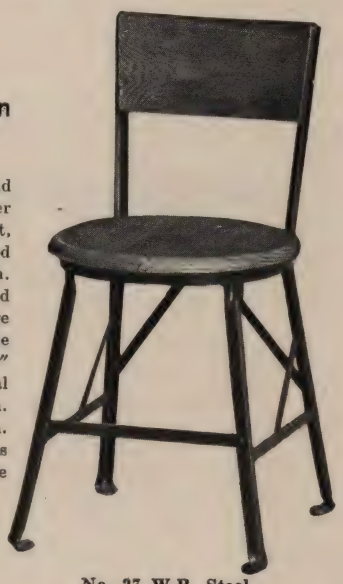

No. 27 W.B. Stool

YOUR CHOICE OF FINISHES: Wood Seats — Natural Birch, Mahogany, School Brown. Steel Parts — Olive Green, School Brown.

ANGLE STEEL STOOL COMPANY, Plainwell, Michigan, U.S.A.

Permanence in Steel

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Miscellaneous Seating

No. 2216 Stool Chair

This stool with saddle seat and steel back is exceptionally comfortable. Birchwood seat, 14½" by 14½" by 1 1/16" thick, natural finish unless otherwise specified. Steel back rest, 12" wide by 6" high with adjustable spring pillars. Ball turned feet formed as an integral part of the angle steel legs. Even sizes from 16" to 34" high. Steel parts, olive green finish, baked on.

No. 2216

No. 1WS Folding Wall Stool

For use in elevators, behind counters and other places where space is limited. Occupies about 2" of space when folded. Solid birchwood seat, 14" dia. by 1 1/16" thick, finished natural unless otherwise specified. 16-gauge under seat channel. 14-gauge wall channel with holes for attaching in place. 5/16" rod brace. Olive green finish steel parts, baked on.

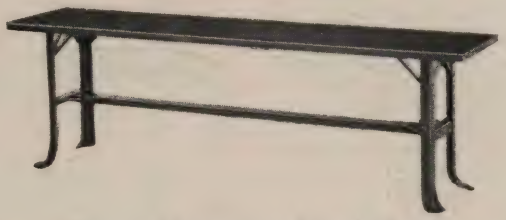

No. 5-18 Locker Bench Seat

This heavily built, well proportioned seat is unsurpassed for locker rooms, gymnasiums, lodge rooms or any place where a bench seat is desired. Heavy angle frame with 16-gauge steel top. Feet flared outward with 5/16" holes for attaching to floor if desired. Can also be furnished with birchwood top at no additional cost. Supplied in 4, 5, 6 and 8-foot lengths. Special sizes made to order. Seat 12" wide and 18" high off the floor. Olive green finish. Set up and crated.

Office Specialties

Seat Cushions

These Seat Cushions are ideal for use on our 14" dia. round wood stool seats. Well and durably made of live sponge rubber, covered with a durable grade green felt cloth. 13" in diameter with tabs for tacking to the wood seat.

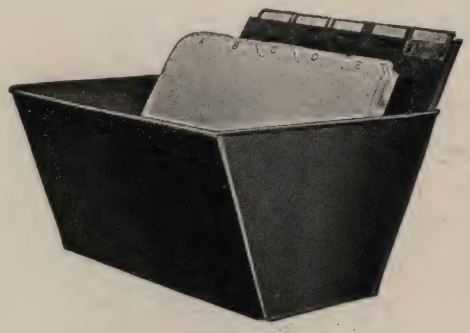

Steel Sorting Tray

Sorting Trays are used in different ways. With an A to Z Index, correspondence is filed for ready reference until placed in the permanent file. With 31 Daily Index, important business is kept under the date required. With Tab Index all business is kept under the name designated. Without Index, used as a posting tray. Letter size, 12" x 12" x 7". Legal size, 12" x 15" x 7". Indexes not included. Olive green finish.

Steel Waste Paper Basket

Steel Waste Baskets eliminate the danger of costly fire from a carelessly thrown match or cigarette stub. Size, 11" x 11" at the top, 9" x 9" at the bottom, 15½" overall height. Olive green finish.

Permanence in Steel

ANGLE STEEL EQUIPMENT—Economical, Sanitary, Durable

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Steel Desks and Stands

No. 28 Desk

No. 28 Foreman's Desk

Top and shelf of 16-gauge. Legs of 1¼" angle. Height, 53" at rear, 44" at front. 34" wide by 28" deep. Drawer, 31" wide by 27" deep by 3½" high inside. Equipped with lock and pulls. Shelf 33¾" wide by 27¾" deep, adjustable. Finished in olive green lacquer. Set up and crated for shipment.

No. 29 Desk

Same as No. 28 above except with two bottom shelves like No. 38 below.

No. 42-26 R. H. Desk

A convenient all-around Steel Desk, 42" wide by 26" deep by 30" high. Plain Steel or Linoleum covered top with steel bound edges. Right hand tier of 3 drawers 14" wide by 24" deep by 4½" high. One drawer 24" wide by 24" deep by 3" high. Plain drawers, no follow blocks. Finished in olive green lacquer. Set up and crated.

No. 42-26 R. H. Desk

No. 42-26 L. H. Desk, with the tier of three drawers at left hand side.

No. 38 Foreman's Desk

Desk top and shelves 16-gauge. Legs and frame of 1¼" angle. Height is adjustable; 37½" to 46½" at front. 34" wide by 28" deep. Compartment pigeon hole top of 20-gauge. Drawer, 31" wide by 27" deep by 3½" high, equipped with lock and pulls. Shelves 33" wide by 16" deep; 12" and 30" off floor. Finished olive green lacquer. Set up and crated.

No. 38 Desk

No. 32-18 Typewriter Stand

No. 32-18 Typewriter Stand

New All Sheet Metal Typewriter Stand answers the demand for a low priced, light weight article of this kind. 32" wide by 18" deep by 26¼" high. Constructed of 18 and 20-gauge sheet steel. Drawer, 10" wide by 12½" deep by 1¼" high, can be used in right hand or left hand position as desired. Olive Green finish. Shipped knocked down.

No. 28-S Desk

No. 28-S Foreman's Desk

A new, rigid and sturdy type of construction is incorporated in this desk. Designed for shipment knocked down. Top and shelf 16-gauge steel. Overall size: 34" wide by 28" deep. 44" high at front, 53" high at back. Drawer, 31" wide by 27" deep by 3½" high, inside, has paracentric key lock. Adjustable shelf. Finished olive green lacquer. Shipped crated with legs and shelf detached.

No. 29-S Foreman's Desk
Same as No. 28-S above except with two bottom shelves like No. 38 Desk.

No. 38-S Foreman's Desk
Has compartment top and two bottom shelves like No. 38 Desk.

No. 24-26 D. L. Typewriter Stand

Top and drop leaves of 5-ply birch veneer wood. Top 24" wide by 17" deep. Drop leaves 12" by 14". Height, 26" from floor. Mounted on 2" swivel rubber wheeled casters. Steel parts finished olive green lacquer. Set up and crated.

No. 24-26 D. L. Typewriter Stand

ANGLE STEEL STOOL COMPANY, Plainwell, Michigan, U.S.A.

Permanence in Steel

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Steel Tables

No. 680 Table

Our new improved design steel tables for office or factory. Overall: 42″ wide by 26″ deep by 30″ high. Fabricated entirely of 16-gauge steel with exception of the drawer. Tapered legs add to good appearance. Well braced for perfect rigidity. Drawer: 26″ wide by 22″ deep by 3½″ high, with bronze finish pull handle. Green finish. SHIPPED KNOCK DOWN. Legs slide easily in place, only your screw driver needed for erecting.

Table Number
680 — Illustrated
640 — Without drawer
Any above tables shipped set up, if desired.

No. 700 Table

All steel table for office and factory. Same rigid construction as No. 680 style. 16-gauge top and shelf. Drawer, 26″ wide by 22″ deep by 3½″ high, with bronze finish pull handle. Olive green lacquer finish. SHIPPED KNOCKED DOWN. Legs and shelf detached.

Table Number
700 — Illustrated
660 — Without drawer
Any above tables shipped set up, if desired.

No. 700 Table

No. 70 Table

Top of 16-gauge, 42″ wide by 26″ deep by 30″ high. Legs of 1½″ angle, flat turned feet. Drawer 26″ wide by 22″ deep by 3½″ high. Shelf 16-gauge 38″ by 22″ by 10″ off floor. Rigid construction insured through riveting and acetylene welding. Finished olive green lacquer. Set up and crated.

No. 70 Steel Table

Table Number
70 — Illustrated
68 — Without shelf; with drawer
66 — Without drawer; with shelf
64 — Without drawer or shelf

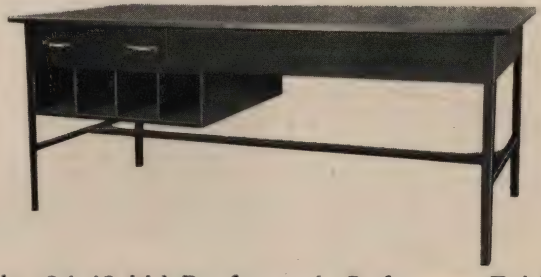

No. 84-42 LH Draftsman's Reference Table

A Draftman's Auxiliary Table, which has proven to be of practical worth in Michigan automotive plants. Overall Size, 84″ wide by 42″ deep by 35″ high. 16-gauge heavy steel top. Drawer, 26″ wide by 37″ deep by 5½″ high, inside size; with pull handles and paracentric key lock. Four pigeon holes, each 8″ wide by 37″ deep by 8″ high, clear size. Olive green finish. Shipped Knocked Down and crated, with legs and pigeon hole unit detached.

No. 84-42 R.H.—Same as above except drawer and pigeon hole unit at right hand side.

No. 60-2 Table

No. 60-2 Steel Table

Has 16-gauge reinforced top 60″ wide by 30″ deep by 30″ high. 16-gauge shelf and heavy angle steel legs. Two drawers, 21½″ wide by 22″ deep by 3½″ high, inside. Finished in olive green lacquer. Set up and crated.

Table Number
60-2 — Illustrated
61-2 — Without shelf; with drawers

No. 5 K. G. Heavy Steel Table

No. 5 K. G. Heavy Steel Table

Top 12-gauge, 144″ wide by 30″ deep by 30″ high. Riveted and acetylene welded construction. Frame work 1½″ angle; legs 2″ angle. Rigidly braced. 8 legs. Finish olive green lacquer. Set up and crated.

All Tables can be built to Special Sizes — Prices quoted on request.

ANGLE STEEL EQUIPMENT—Economical, Sanitary, Durable

Permanence in Steel

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Steel Mailing Tables

No. 3041

No. 3041 Mailing Table

This is the number 3040 table with a door added. With the door all compartments can be locked and kept dust free as well. Door folds back over top when open. Any of our mailing tables can be made with door if desired.



No. 3060 Compartment Top only

A compartment top will convert the table you now have into an efficient mailing unit. No. 3060 illustrated above. Over-all size: 61½" wide by 15" deep by 20½" high. 36 compartments the same as No. No. 3060-D mailing table opposite. Removable shelves with label holders. 2½" high enclosed base. Compartment tops only can be had in any of our regular patterns, also built special to order. Also furnished with a flanged base to fit over the compartment tops of our regular tables to give extra capacity. Be sure to specify flanged base if this pattern is wanted.

No. 3260-EDS Mailing Table

This Mailing Table with compartments for both letters and envelopes will speed up your out-going mail. Compartments are raised to allow full size working space on the table top. Over-all size: 60" wide by 30" deep by 59" high. Compartment top: 24 compartments for envelopes, each 4½" wide by 12" deep by 2½" high; 24 compartments for letters, each 10" wide by 12" deep by 2½" high. Removable shelves equipped with label holders. 16-gauge steel working top 30" high off floor. Two drawers each 21½" wide by 22" deep by 3½" high, with bronze finish pull handles. Olive green finish. Shipped crated with legs detached.

No. 3040 Mailing Table

An all-steel, mail sorting Table. Has 16 - compartment top, each compartment 10" wide by 15" deep by 2½" high. Table top has working space 41½" wide by 18" deep. Table top 16-gauge steel, and 30" high off floor. Overall size complete: 41½" wide by 33" deep by 44½" high. Finished olive green lacquer. Set up and crated.

No. 3040

No. 3060-D Mailing Table

Large size Steel Mailing Table. 36 compartment top, each compartment 10" wide by 15" deep by 2½" high. Two drawers 21½" wide by 22" deep by 3½" high. Table top 16-gauge; working space 18" deep by 30" off floor. Overall: 61½" wide by 33" deep by 50½" high. Olive green finish. Set up crated.

No. 3060-72D Mailing Table

Extra large Mailing Table, all steel. Has 72 compartments 10" wide by 15" deep by 2½" high. Drawer size, 16" wide by 18" deep by 4" high, with lock. Mail bag rack on end. Table top work space, 61½" wide by 18" deep, 30" off floor. Over-all: 61¾" wide by 33" deep by 68½" high. Finished olive green lacquer. Set up and crated.

No. 3060-72D

All Tables can be built to Special Sizes — Prices quoted on request.

ANGLE STEEL STOOL COMPANY, Plainwell, Michigan, U.S.A.

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Steel Cabinets

No. 36 Cabinet

No. 36 Cabinet

Interior frame of angle steel, covered with sheet steel outside. Has 36 drawers in two tiers of 18 drawers each. Drawer size: 10″ wide by 15″ deep by 3″ high, inside. Equipped with combination bronze finish label holders and pulls. Overall size: 69½″ high by 24″ wide by 16″ deep. Mounted on 2″-dia. steel swivel casters. Olive green lacquer finish. Set up and crated.

No. 28-20 Cabinet

No. 28-20 Cabinet

For office or factory and storage of electrotypes this cabinet is unequalled in value. All-steel, swivel casters with 28 drawers in one tier. Height 51″, width 22½″, depth 18¼″. Inside measure of drawers: 20″ wide by 18″ deep by 1¼″ high. Olive green finish. Set up and crated.

No. 212 Cabinet

These large double-door cupboards are the most popular and practical type of storage equipment for factory or office. Built of sheet steel throughout, they are vermin proof, dust proof, and fire-resisting. Double doors are reinforced and equipped with double handles and lock. Shelves are adjustable on ½″ centers. Each cabinet is regularly equipped with four shelves. The height is 78″ and width 36⅛″. The depth front to back varies from 12″ minimum to 24″ maximum and is priced accordingly. Finish is olive green lacquer inside and outside. Set up and crated for shipment.

No. 212 Cabinet

No.	Depth
210	24″
212	18″
213	15″
214	12″

No. 18-24 Cabinet

Interior frame of angle steel, covered with sheet steel outside. 18 drawers in one tier. 12 top drawers, 24″ wide by 18″ deep by 1½″ high, inside size. 6 bottom drawers, 24″ wide by 18″ deep by 3″ high, inside size. Each drawer has a removable center divider running front to back. (Can be furnished without dividers —see price list.) Drawers have bronze finish label holders and pulls. Overall size: 26½″ wide by 18½″ deep by 51″ high. 2″-dia. steel wheel swivel casters. Olive green finish. Set up and crated.

No. 18-24 Cabinet

No. 12-12 BL Cabinet

No. 12-12 Cabinet

Interior frame of angle steel, covered with sheet steel outside. Has 12 drawers in one tier, each of size: 12″ wide by 18″ deep by 2″ high, inside measure. Drawers have combination bronze finish label holders and pulls. Overall of Cabinet, 40″ high by 14½″ wide by 18½″ deep. Mounted on 2″-dia. steel swivel casters. Finished olive green lacquer. Set up and crated. Has locking bar front, furnished without padlock.

Also furnished without locking bar — see price list.

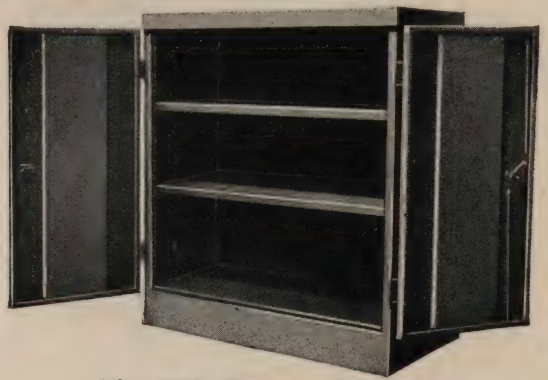

No. 230 Counter Cabinet

Entirely built of sheet steel. Has 2 adjustable shelves. Size overall: 36⅛″ wide by 42″ high. Door has attractive throw latch handles with lock. Finished olive green lacquer. Set up and crated.

No.	Depth
230	18″
232	24″

(Special Cabinets will be quoted upon receipt of specifications.)

ANGLE STEEL EQUIPMENT—Economical, Sanitary, Durable

Permanence in Steel

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Steel Cabinets

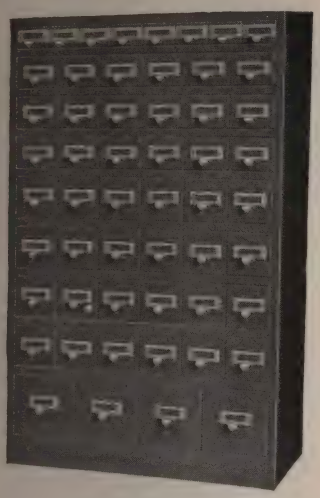

No. 3875 Cabinet

A Sundry Cabinet containing 54 drawers, total. For storing small parts, tools, etc. Overall size: 25¾" wide by 10½" deep by 43½" high. All drawers 10" deep with combination bronze finish label holder and pull. Drawer sizes: top row, 2⅞" wide by 2" high. Next 3 rows, 3⅞" wide by 3" high. Next 4 rows, 3⅞" wide by 4" high. Bottom row, 5⅞" wide by 6" high. Finished olive green lacquer. Set up and crated.

No. 6-42-30 Blue Print Cabinet

Each drawer has 3" hood at back to prevent prints from curling. Drop weight at front holds prints flat as they are filed. Easily-operating drawers, rigid and on reinforced channel bottoms. Six large drawers in one tier. Each drawer 42" wide, 30" deep, 4" high inside. Cabinet size: 44½" wide, 30½" deep and 33½" high. Equipped with stops so drawers will not pull clear out. Locking device can be furnished if desired.

No. 6-42-30 Blue Print Cabinet

No. 16-16 Cabinet

Has 16 drawers in two tiers, each drawer divided into compartments as follows: 12 drawers 2½" high subdivided into 28 compartments of size, 2⅛" wide by 2¾" deep. The four bottom drawers are subdivided into four lengthwise compartments, 3¾" wide by 11½" deep by 4½" high. Each drawer has two bronze finish pull handles and center bronze finish label holder. Overall of Cabinet, 35½" wide by 12" deep by 28¾" high. Finished in olive green lacquer. Set up and created.



No. 6-10 Cabinet

A Cabinet to set on the bench, to hold parts, small tools, etc. Cabinet overall is 24" wide by 15½" deep by 13½" high. Has six drawers in two tiers, each 10" wide by 15" deep by 3" high inside and equipped with bronze finish label holder and pull. Two loose lift-out trays with 8 compartments each may be had to fit in each drawer — See Price List. Finished olive green lacquer. Set up and crated.

No. 3-30 Three-Drawer Horizontal Cabinet

Each drawer inside measures 9¼" wide by 14½" deep by 6⅝" high. Each drawer with combination bronze finish label and pull, also with friction follower blocks. Over-all of cabinet, 30¼" wide by 15" deep by 8⅞" high. Finished in olive green lacquer throughout. Made in special sizes to meet special requirements. Write for prices.

No. 36-24 Tool Cabinet

Fills the need for a tool storage space. Tray top serves as a work table. Overall, 24" wide by 16" deep by 36" high. Two loose shelves adjustable on 6" centers. Door has knob lock with two keys. Olive green finish. Set up and crated.

(Special Cabinets will be quoted upon receipt of specifications.)

ANGLE STEEL STOOL COMPANY, Plainwell, Michigan, U.S.A.

Permanence in Steel

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Steel Bench Legs

No. 29-23

A single angle Bench Leg for table use or light bench. Has 1½x1½x⅛" angle for legs and girt, with 2x2x⅛" angle for the top. Well braced by heavy flat steel bands. Riveted construction. Top, girt, and feet punched. Finished olive green enamel. Set up. (Planks not furnished.)

Height	Top Length	Width
29"	23"	2"
30"	23"	2"
31¼"	23"	2"
32"	23"	2"
34"	23"	2"

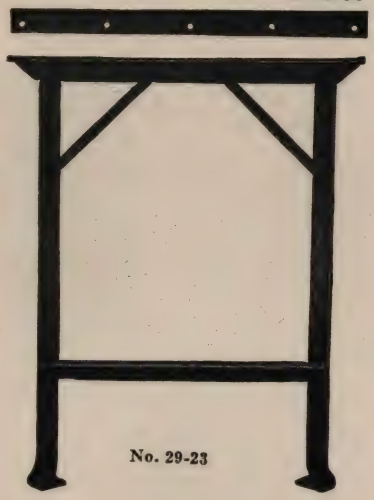

No. 29-23

No. 3-30

A very sturdy, rigid type of Bench Leg. Built throughout of 1½x1½x⅛" angle steel and braced with ⅜x¾" steel band braces. Riveted construction. Top, girt, and feet properly punched for attaching planks. (Planks not furnished.) Finished in olive green enamel. Set up.

Height	Top Length	Width
29"	30"	3⅜"
30"	30"	3⅜"
31¼"	30"	3⅜"
32"	30"	3⅜"
34"	30"	3⅜"

No. 2-26 and No. 3-30

No. 2-26 Bench Leg

This is the same type of leg as No. 3-30 described above, except the top is 26" long, and it is built of 1¼x1¼x⅛" angles. Top width is 2⅞".

No. 8-26

New pattern general purpose Bench Leg. Durably constructed of 1¼x1¼x⅛" angles, with ⅜x¾" band steel braces. Top projects 4" over the front leg. 9" angle extensions at back are removable. Top, back, girt and feet punched ready to use. (Planks not furnished.) Finished olive green enamel. Set up.

Height	Top Length	Width
29"	26"	2⅞"
30"	26"	2⅞"
31¼"	26"	2⅞"
32"	26"	2⅞"
34"	26"	2⅞"

No. 4-26

Same as the No. 8-26 described above, except without the back extension pieces.

No. 8-26

Without Back Piece, same Leg is No. 4-26.

No. 5-26

Our most popular selling Bench Leg. Quality built throughout. Top, legs, and girt built of 1¼x1¼x⅛" angle. Front of top has 4-inch projection over front leg. Heavily braced with band steel. Top, girt, and feet punched. (Planks not furnished.) Capable of withstanding great weight. Finished olive green enamel. Set up.

Height	Top Length	Width
29"	26"	5"
30"	26"	5"
31¼"	26"	5"
32"	26"	5"
34"	26"	5"

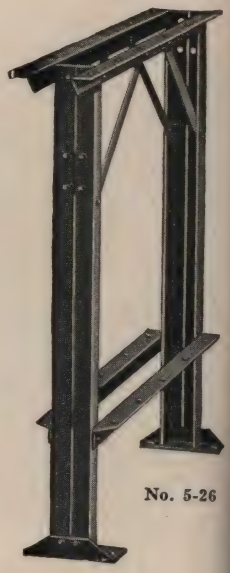

No. 5-26

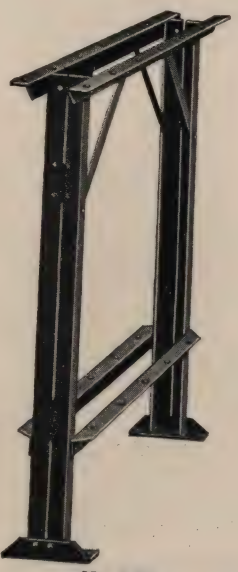

No. 5-36

No. 5-36

A heavy, high quality Bench Leg pattern especially suitable for building a wide top Bench. Top is 36" long by 5" wide; the top overhanging the legs 4" on each end. Top, legs, and girt built of 1¼x1¼x⅛" angle; properly punched. (Planks not included.) Heavily braced, riveted construction. Finished olive green enamel. Set up.

Height	Top Length	Width
29"	36"	5"
30"	36"	5"
31¼"	36"	5"
32"	36"	5"
34"	36"	5"

Top lengths may also be had in 42", 48", and 54" sizes, same heights as above. Write for prices.

No. 9-26

No. 9-26

A heavy, durable wall-type Bench Leg for building a Bench where a back board is desired. The back leg extends 9" above top. Top, legs, and girt of 1¼x1¼x⅛" angle, braced with heavy band steel. Top, girt, and feet punched. (Planks not furnished.) Finished in olive green enamel. Riveted construction. Set up.

Height	Top Length	Width
29"	26"	5"
30"	26"	5"
31¼"	26"	5"
32"	26"	5"
34"	26"	5"

Top lengths may also be had in other sizes if desired. Write for prices.

SPECIAL SIZES QUOTED ON REQUEST

ANGLE STEEL EQUIPMENT—Economical, Sanitary, Durable

Permanence in Steel

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Steel Bench Drawers

No. 1218-PCT

An all sheet metal Bench Drawer. Has pan cover guide top of 16-gauge. Drawer body of 20-gauge with 16-gauge fronts. Inside sliding removable tray 24-gauge 6″ wide by 1½″ high. Spot welded construction throughout. Built for padlock, lock not furnished. Can be furnished with paracentric key lock. Olive green enamel finish. Set up.

No.	Width	Depth	Height
1218-PCT	12″	18″	4″
1618-PCT	16″	18″	4″
2018-PCT	20″	18″	5″

No. 1218 — Rear View

No. 1218

Bench Drawer with side guides. Gauge construction same as No. 1218-PCT above. Has tongue for padlock (lock not furnished). Can also be supplied with paracentric key lock. Can be furnished with 6″ wide by 1½″ sliding tray if desired. Finished olive green enamel.

No.	Width	Depth	Height
1218	12″	18″	4″
1618	16″	18″	4″
2018	20″	18″	5″

No. 8 Tool Box

Built of 18-gauge sheet steel. 19¼″ long by 7⅛″ wide by 8⅛″ high. Inside has stationary tray 2″ wide by 2″ deep by 19″ long. Has hasp and staple for padlock (no padlocks furnished). Finished olive green lacquer. Set up.

No. 8 Tool Box

ROLNICK STEEL EQUIPMENT CO.
(ANGLE STEEL STOOL SALES CO.)
N. Y. & N. J. DISTRIBUTORS
98-100 PARK PLACE
NEW YORK
PHONES BARCLAY 7-5559--60

Steel Work Benches

No. 48-30 Steel Bench

Suitable for any kind of shop work. Heavy, rugged and rigid. Built in various sizes. Top and shelf of 12-gauge reinforced steel. Legs of heavy angle steel. Turned up back and ends 4″ high. Has heavy channel back brace. Finished throughout in olive green lacquer. Shipped knocked down, all bolts and nuts furnished for easy erection. Drawer size. 20″ wide by 18″ deep by 5″ high. Arranged for padlock (padlock not furnished). Drawer has sliding tray.



Illustrating how two or more of our Steel Benches are joined together to make a continuous running length unit. These Benches may be had without backs, ends, or shelves if desired.

No. 22-84 Iron Bar Rack

No. 22-84

Designed for storing bars of all kinds, shafting, pipe, etc. May be used singly to store lengths up to 8 feet; or two of these Racks placed in line to store long pieces. Built of 1¼″ x 1¼″ x ⅛″ angle, welded construction. Strong and durable, capable of holding heavy loads. Size: 84″ high by 21″ square at the bottom. Cross bars spaced 7″ apart and extend 8″ clear of uprights. Finished olive green lacquer. Each half erected and shipped flat for bolted assembly.

ANGLE STEEL STOOL COMPANY, Plainwell, Michigan, U.S.A.

Permanence in Steel

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Steel Machine Tenders

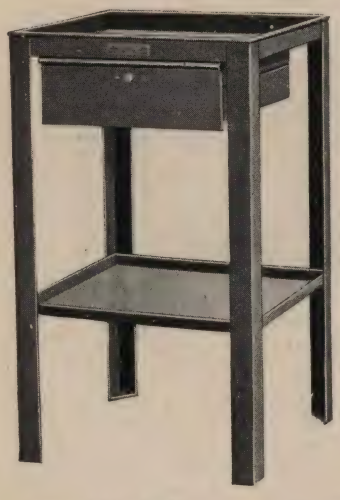

No. 216

A popular pattern Tool Stand widely used in machine shops. Top and shelf of 16-gauge with edges turned up. Legs of 1¼"x1¼"x⅛" angle. Size overall. 36" high by 20" wide by 20" deep. Drawer, 16" wide by 18" deep by 4" high; with lock and two keys. Finished olive green lacquer. Set up and crated.

No. 218-DC

Our most popular seller Machine Tender. Sturdy, efficient, durable. All shelves of 16-gauge riveted to heavy angle legs. Mounted on 2" dia. steel swivel casters. Overall size: 24" wide by 18" deep by 35" high. Drawer: 16" wide by 18" deep by 4" high, inside, equipped with lock and two keys. Finished olive green lacquer. Set up and crated. Can be furnished without casters or without lock on drawer if desired.

No. 218-C, same as above, but without drawer.

No. 218-DC

No. 217-CH

No. 217-CH

A compact, neat Machine Tender. Top and middle shelf turned up 2½" back and side edges, 16-gauge sheet steel. Bottom shelf 16-gauge turned up 2½" all around. Overall, 24" wide by 18" deep by 35" high. Riveted construction, 2½" dia. steel swivel casters. Finished olive green lacquer. Set up and crated. Also furnished with drawer, 16" wide by 18" deep by 4" high.

No. 10-G Portable Work Bench

The decided labor saving possibilities of this Portable Bench are readily visible. Legs and frame are of 1½" x 1½" x ⅛" angle. Top 12-gauge, shelf 16-gauge sheet steel. Overall size, 36" wide by 20¾" deep by 36" high. Six drawers, 11⅞" wide by 20" deep. Three bottom drawers 3" high, three top drawers 1" and 2" high, inside measurements. Locking plate over drawer fronts. (Padlock not furnished.) 6" dia. steel casters at one end. Olive green finish. Set up.

No. 10-G

No. 18-34

A small light truck suitable for handling light merchandise, books, or for office use. The two shelves are 24" by 18", of 16-gauge sheet steel. Ends of 16-gauge project 7" above top shelf. Lower shelf 17" from floor and 9" between shelves. Overall height is 34". Casters are 2" dia. steel wheel swivel type. Olive green lacquer finish. Set up.

No. 18-33, same truck but with three shelves of 16-gauge.

No. 18-34 Light Merchandise Truck

No. 48-24-50

This truck offers the maximum amount of loading space. Bed 10" off floor. Loading space, 40" high by 48" wide by 24" deep. Overall height 50". Heavily built of angle steel with 16-gauge sheet steel bedplate, sides and back. Heavy handle one end. 5" swivel and 6" stationary casters. Olive green lacquer finish. Set up.

No. 48-24-50. Low Bed Truck.

ANGLE STEEL EQUIPMENT—Economical, Sanitary, Durable

Permanence in Steel

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Steel Trucks for Factory and Shop

All Trucks Shown Below Built in Following Sizes:
30″ long by 20″ wide
36″ long by 20″ wide
40″ long by 20″ wide
40″ long by 24″ wide
46″ long by 24″ wide



No. 3020-A Low Truck

A low, open bed Truck 6½″ high. Tongue pull handle furnished with each order. 3″ swivel casters one end, 4″ stationary casters at rear, semi-steel wheels. Heavy angle construction. Finished olive green lacquer. Set up. Also furnished with 16-gauge bedplate, if desired.

No. 3020-B Flat Top

A flat top Truck 18″ high from floor. Heavy riveted construction. Swivel casters one end, stationary at opposite, semi-steel wheels. Finished olive green lacquer. Set up.

No. 3020-C with Handle

No. 3020-C with Handle

A flat top Truck 18″ high, with handle 42″ high off floor. Top bar of 1¼″ outside dia. pipe. Heavily riveted; swivel casters one end, stationary type opposite, semi-steel wheels. Olive green lacquer finish. Set up.

No. 3020-D

A closed end Truck. Bedplate 20″ high, ends 35″ high from floor. Stationary casters on one end, swivel casters on the other, semi-steel wheels. Riveted construction, olive green lacquer finish. Set up.

No. 3020-E

No. 3020-E

Back and ends closed, open front. Bedplate 20″ high, ends and back 35″ high off floor. Stationary casters on one end, swivel casters on the other, semi-steel wheels. Riveted construction, olive green lacquer finish. Set up.

No. 3020-F

A closed side Truck. Box part 15″ high, of 16-gauge. Height overall, 35″. Stationary casters on one end, swivel casters on the other, semi-steel wheels. Riveted construction, olive green lacquer finish. Set up.

Capacity of trucks shown on this page: 1,000 lbs. with B type casters.
(See Price List) 2,000 lbs. with A type casters.
SPECIAL SIZE TRUCKS QUOTED ON REQUEST

ANGLE STEEL STOOL COMPANY, Plainwell, Michigan, U.S.A.

Permanence in Steel

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Steel Trucks for Factory, Shop and Office

No. 74-61 (ABOVE)

No. 74-61

A rack Truck for handling bulky merchandise. Built of angle steel for bed and end uprights. Loading space, 74″ long by 18″ wide by 61″ high. Overall height, 73″. 5″ swivel and stationary casters with semi-steel wheels. Riveted construction. Finished olive green lacquer. Set up.

No. 4 O.B.

An all-purpose Bus for general office use. Four shelves are 38″ by 20″ of 16-gauge sheet steel. 9½″ clearance between shelves. Overall height is 41″. Brass handle each end. Mounted on 5″ swivel and 5″ stationary semi-steel wheel casters. Finished olive green lacquer. Set up and crated.

No. 4 C.B.—Same as No. 4 O.B. above except shelves enclosed at back.

No. 4O.B. Bus

No. 3620-33 Die Truck

No. 3620-33

Built heavy to handle heavy dies. 36″ long by 20″ wide by 33″ high. 12-gauge flat top, heavy angle uprights, riveted construction, rigidly braced. Four swivel semi-steel wheel, A type casters, 5″ dia. Finished olive green lacquer. Set up.

No. 36-36-36 Bin

No. 36-36-36

A closed Bin used to store excelsior, dirt, rubbish, etc. Built of 16-gauge sheet steel. Hinged cover held by counter balance weight, with fusible fire link in chain. Over-all: 39″ wide by 41″ deep by 69″ high. Box proper is 36″ wide by 36″ deep by 36″ high. Mounted on four swivel 4″ dia. casters with semi-steel wheels. Finished olive green lacquer. Set up and crated.

No. 24-24-40 Box Truck

Box part of 16-gauge sheet steel, 40″ long by 24″ wide by 24″ high. Overall height, 33″. Angle frame and angle corner uprights. 5″ swivel and 6″ stationary, semi-steel wheel, A type casters. Riveted construction. Olive green lacquer finish. Set up. 1200 to 2000 lbs. capacity.

No. 36-24-24 Box Truck

New pattern Box Truck, constructed throughout of 16-gauge sheet steel. Inside dimensions: 36″ long by 24″ wide by 24″ high. Top edges turned outward and down and double brakes at the corners for rigidity. B type casters with semi-steel wheels; two 5″ dia. swivel at one end, two 5″ dia. stationary at the other. Acetylene and spot welded construction. Olive green finish. Set up. 1,000 lbs. capacity.

SPECIAL SIZE TRUCKS QUOTED ON REQUEST

Permanence in Steel

ANGLE STEEL EQUIPMENT—Economical, Sanitary, Durable

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Knitting and Textile Mill Steel Equipment

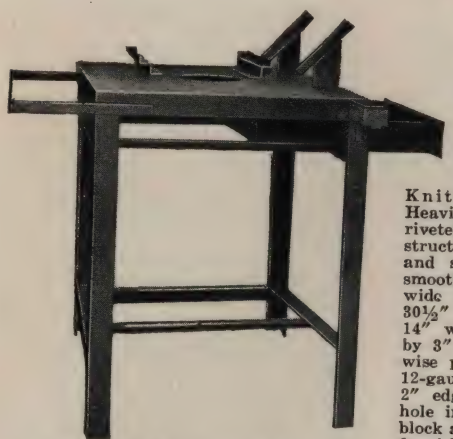

No. 24-24 Bar Topping Table

No. 24-24

This Bar Topping Table is our very latest design, incorporating all suggested improvements given us by experienced Knitting Mill men. Heavily built of steel, riveted and welded construction, with all edges and surfaces carefully smoothed. Size: 24″ wide by 24″ deep by 30½″ high. Drawer: 14″ wide by 18″ deep by 3″ high, with crosswise partition. Top of 12-gauge turned down 2″ edges with 6″ dia. hole in center. Boning block adjustable. Tables furnished in either right or left hand patterns. Equipped exactly as Illustrated. Finished olive green lacquer. Set up and crated.

No. 36-12

Built entirely of 16-gauge and 20-gauge sheet steel, smoothed edges and surfaces. Size: 36″ wide by 14″ deep by 42″ high. Top compartment and double compartment 11″ high. Bottom inclosed compartment 12″ high. Water pan 2″ high with perforated top. Cabinet top has yardstick inset at front edge. Bar racks at back extend 7″. Finished throughout in olive green lacquer. Set up and crated. Note: Top may also be had with stainless steel polished finish, not lacquered.

No. 36-12 Knitters Cabinet

No. 42-72

No. 42-72 Matching and Pairing Table

A rugged built, smooth surfaced and edged table. Overall: 72″ wide by 42″ deep by 36″ high, top of 16-gauge. Legs formed of 14-gauge angle. Drawer size. 16″ wide by 18″ deep by 4″ high. Finished olive green lacquer. Shipped knocked down and crated.

No. 34-34S

This Hosiery Rack is 36¼″ wide by 35″ deep by 104″ high overall, with twelve guides spaced 8″ apart on centers. Built to take board shelves 34″ wide by 34″ deep overall. (Shelves not furnished.) Uprights and guides of 14-gauge formed angle; enclosed top of 18-gauge sheet steel. Substantially braced. Finished olive green lacquer. Shipped knocked down, all bolts and nuts furnished. Crated.

This same rack built two-sided to hold 24 shelves is No. 34-34D.

Also see Price List for No. 30-30S and No. 30-30D Racks for boards 30″ wide by 30″ deep. (Boards not furnished.)

No. 34-34S Hosiery Rack

No. 60-36-34 Knitters Examining Table

Size: 60″ wide by 36″ deep by 34″ high. Actual working height, 30″. Wells are 15″ high by 15″ wide by 36″ deep. Legs of 16-gauge formed angle, sheet steel top and wells of 16-gauge. Welded construction. Buttons and buttonholes on ends for connecting additional tables. Adjustable pipe foot rest. Finished olive green lacquer. Set up and crated.



No. 27-17-16 Knitters Box

No. 27-17-16 Knitters Box

20-gauge sheet steel with rounded top edges. Legs 1½″ angle. Spot welded construction. Size: 27″ wide by 17″ deep by 16″ high, box part. Overall, 22″ high. Olive green lacquer finish. Set up and crated.

ANGLE STEEL STOOL COMPANY, Plainwell, Michigan, U.S.A.

Permanence in Steel

Please address all communications to
NEW YORK CITY OFFICE

ANGLE STEEL STOOL CO., PLAINWELL, MICH.

Manufacturers of Angle Steel and Sheet Metal Equipment for Factory, Shop and Office

Miscellaneous Steel Equipment



No. 100 Pigeonhole Cabinet

No. 100 Cabinet

A Pigeonhole Cabinet built entirely of sheet steel, spot welded assembly. Has 100 pigeon holes 3″ wide by 3″ high by 5½″ deep. Labels may be pasted on shelves. Overall, 32¼″ wide by 37″ high by 6″ deep. Finished olive green lacquer. Set up and crated.

Special sizes will be quoted upon receipt of specifications.

No. 019 Bank Vault Step

Light weight bank vault step made entirely of sheet steel. Overall size: 18″ wide by 15″ deep at the bottom by 18½″ high. From floor to bottom step, 9″. From bottom step to top step, 9½″. Each step 18″ wide by 7″ deep. Olive green finish. Set up and crated.

No. 019 Bank Vault Step

No. 20 Vault Step

Height 20″ overall. Steps spaced 10″ apart. Width 19″ by 20″ deep at bottom. Top step 10″ deep. Sheet steel steps, angle steel frame. Finished olive green enamel. Set up and crated.

No. 22 — Same as illustrated, but with linoleum covered steps, steel bound edges.

No. 88 Drill and Reamer Cabinet

Accommodates a variety of drills and reamers, all sizes. Built of 20-gauge sheet steel. Has 7 shelves with total of 88 compartments. Label holder on each shelf. Compartments are varying width and depth. Overall: 47″ high by 33¼″ wide by 6½″ deep at top by 17¾″ deep at bottom. Olive green lacquer finish. Set up and crated.

No. 88

No. 108 Drill and Reamer Cabinet

Designed for holding various sizes and lengths of drills and reamers. Built of 20-gauge sheet steel throughout. Has 9 shelves, each with 12 compartments; 108 total. Label holders run full width of shelves. Each compartment is 3″ wide by 3½″ high with length varying according to taper of bin. Overall: 38″ high by 35½″ wide by 6½″ deep at top by 17¾″ deep at bottom. Olive green lacquer finish. Set up and crated.

No. 108

No. 160 Waste Can

For use in depositing dangerous inflammable materials, such as oily waste, rags, paper, etc. Built of 20-gauge galvanized steel. Mounted on 2″ dia. swivel casters. Easily moved about. Cover is always closed and is raised by means of foot lever. Built in two sizes: No. 160 is 16″ square by 29″ high. No. 180 is 18″ square by 31″ high. Set up and crated.

No. 160 Waste Can

ROLNICK STEEL EQUIPMENT CO.
(ANGLE STEEL STOOL SALES CO.)
N. Y. & N. J. DISTRIBUTORS
98-100 PARK PLACE
NEW YORK
PHONES BARCLAY 7-5559--60

Permanence in Steel

ANGLE STEEL EQUIPMENT—Economical, Sanitary, Durable

Angle Steel Stool Company

PLAINWELL, MICHIGAN, U. S. A.

ROLNICK STEEL EQUIPMENT CO.
(ANGLE STEEL STOOL SALES CO.)
N. Y. & N. J. DISTRIBUTORS
98-100 PARK PLACE
NEW YORK
PHONES BARCLAY 7-5559--60

PRICE LIST No. 625

Revised and Corrected to March 1, 1937

Applying to Our Regular

Catalog E

PRICES ARE LIST AND SUBJECT TO DISCOUNT

TERMS

2% 10 days from date of invoice, 30 days net, F. O. B.
Plainwell, Michigan

All prices subject to change without notice

Please address all communications to
NEW YORK CITY OFFICE

NOTE
EFFECTIVE APRIL 1, 1937
ADD 5% TO ALL LIST PRICES
BEFORE FIGURING DISCOUNTS

STEEL EQUIPMENT

for FACTORY, SHOP and OFFICE

YOUR ATTENTION

. . . TO THE DETAILS BELOW WILL EXPEDITE THE PROMPT FILLING of YOUR ORDERS . . .

Have you given us:

1. Correct Catalog Number in full?
2. Correct name of article and description?
3. All necessary dimensions, such as:
   seat heights, length, width, height?
4. Finish: Wood seats and wood backs, Natural, Mahogany or School Brown?
   All steel parts olive green enamel, unless otherwise specified.
5. Any special instructions pertaining to your order?

NOTE: ***Weights as shown are approximate shipping weights and subject to correction on bill of lading.***

CHECK ALL ORDERS CAREFULLY

LIST PRICES ON STEEL SEATED STOOLS

13 inch Dia. Concave Seats of Heavy 16 Gauge Steel.

Note: Nos. 5DS and 55DS Stools Have 15″ Dia. Seats.

Olive Green Enamel Finish, Baked On.

Catalog Page	Height or Size	STOOLS WITHOUT BACKS			STOOLS WITH STEEL BACKS		
		Catalog Number	List Price Each	Shipping Weight	Catalog Number	List Price Each	Shipping Weight
3	16″ or 18″	4	$ 2.20	9 lbs.	44	$ 3.60	13 lbs.
	20″ or 22″		2.30	9½ lbs.		3.70	13½ lbs.
	24″ or 26″		2.50	10½ lbs.		3.90	14½ lbs.
3	24″ or 26″	4DS	2.80	12 lbs.	44DS	4.20	16 lbs.
	28″ or 30″		3.10	14 lbs.		4.50	18 lbs.
	32″		3.25	15 lbs.		4.65	19 lbs.
	34″		3.55	17 lbs.		4.95	21 lbs.
	36″		3.85	18 lbs.		5.25	22 lbs.
3	18″	6	2.40	8 lbs.	66	3.40	12 lbs.
	20″ or 22″		2.50	9 lbs.		3.50	13 lbs.
	24″ or 26″		2.70	10 lbs.		3.70	14 lbs.
	28″ or 30″	6DS	3.30	12 lbs.	66DS	4.30	16 lbs.
3	16″ or 18″	40	2.40	10 lbs.	440	3.80	14 lbs.
	20″ or 22″		2.50	11 lbs.		3.90	15 lbs.
	24″ or 26″		2.80	12 lbs.		4.20	16 lbs.
3	24″ or 26″	40DS	3.30	13 lbs.	440DS	4.70	17 lbs.
	28″ or 30″		3.50	14 lbs.		4.90	18 lbs.
	32″ or 34″		3.70	16 lbs.		5.10	20 lbs.
	36″ or 38″		4.00	18 lbs.		5.40	22 lbs.
3	18″	5DS	3.70	12 lbs.	55DS	5.20	16 lbs.
	20″ or 22″		3.90	13 lbs.		5.40	17 lbs.
	24″ or 26″		4.20	15 lbs.		5.70	19 lbs.
	28″ or 30″		4.50	16 lbs.		6.00	20 lbs.
	32″ or 34″		4.80	17 lbs.		6.30	21 lbs.
	36″		5.40	18 lbs.		6.90	22 lbs.

Discounts Apply to All List Prices.

LIST PRICES ON WOOD SEATED STOOLS

Solid Birch Wood, Concave Seats—14″ Dia. x 1-1/16″ Thick.
Your Choice of Finishes: Wood Seats, Natural Birch—Mahogany—Walnut or School Brown.
Steel Parts, Olive Green—School Brown.
Natural Birch Seats and Olive Green Frames Furnished, If Not Otherwise Specified.
For Wood Backs Instead of Steel Backs, Add to the List Price—50c.

Catalog Page	Height or Size	STOOLS WITHOUT BACKS			STOOLS WITH STEEL BACKS		
		Catalog Number	List Price Each	Shipping Weight	Catalog Number	List Price Each	Shipping Weight
4	16″ or 18″	1	$ 2.80	9 lbs.	11	$ 4.20	13 lbs.
	20″-22″-24″		2.90	12 lbs.		4.30	16 lbs.
	26″		3.10	13 lbs.		4.50	17 lbs.
4	24″ or 26″	1DS	3.75	13 lbs.	11DS	5.15	17 lbs.
	28″ or 30″		3.90	15½ lbs.		5.30	20 lbs.
	32″ or 34″		4.20	16 lbs.		5.60	20 lbs.
	36″		4.40	17 lbs.		5.80	21 lbs.
4	28″	3TSH	4.85	16 lbs.	3TSB	6.25	20 lbs.
	30″		5.10	17 lbs.		6.50	21 lbs.
	32″		5.60	18 lbs.		7.00	22 lbs.
	34″		6.10	19 lbs.		7.50	23 lbs.
	36″		6.60	20 lbs.		8.00	24 lbs.
4	18″ or 20″	100	3.30	10 lbs.	110	4.70	14 lbs.
	22″-23″-24″		3.44	12 lbs.		4.84	16 lbs.
	26″		3.60	13 lbs.		5.00	17 lbs.
	27″-28″-30″		3.80	15 lbs.		5.20	19 lbs.
4	24″ or 26″	100DS	4.25	13 lbs.	110DS	5.65	17 lbs.
	28″ or 30″		4.40	15 lbs.		5.80	19 lbs.
	32″ or 34″		4.90	17 lbs.		6.30	21 lbs.
	36″		5.50	18 lbs.		6.90	22 lbs.
4	24″ or 26″	328DS	4.25	13 lbs.	428DS	5.65	17 lbs.
	28″ or 30″		4.40	15 lbs.		5.80	19 lbs.
	32″ or 34″		4.90	17 lbs.		6.30	21 lbs.
	36″		5.50	18 lbs.		6.90	22 lbs.
ADJUSTABLE LEGGED STOOLS AND CHAIRS					STOOLS AND CHAIRS WITH WOOD BACKS		
5	17″ to 25″	101 or 102	$ 4.20	14 lbs.	111WB or 112WB	$ 6.10	19 lbs.
	26″ to 34″		5.00	16 lbs.		6.90	21 lbs.
5	17″ to 25″				111SWB or 112SWB	6.85	19 lbs.
	26″ to 34″					7.65	21 lbs.
5	17″ to 25″	104 or 105 with Steel Seats — 18″ dia.	3.90	13 lbs.	114SB or 115SB with Steel Seat and Back	5.30	17 lbs.
	26″ to 34″		4.70	15 lbs.		6.10	19 lbs.
5	17″ to 25″				A111WB or A112WB	6.10	19 lbs.
	26″ to 34″					6.90	21 lbs.
5	17″ to 25″				A111SWB or A112SWB	6.85	19 lbs.
	26″ to 34″					7.65	21 lbs.

For Rubber Tipped Feet and Casters see Back Page

LIST PRICES ON POSTURE CHAIRS

Catalog Page	Number / Description / Height	276 LC-PVR Baco Casters List Price	276 LC-PVR Steel Casters List Price	276 L-PVR Without Casters List Price	Shipping Weight
6	14″ to 19″	$ 19.00	$ 17.70	$ 16.50	30 lbs.
	17″ to 22″	19.00	17.70	16.50	30 lbs.
	20″ to 25″	19.50	18.20	17.00	31 lbs.

No. B276LC-PVR—Same as above except back rest 2½″ farther back—Same list prices.

Catalog Page	Number / Description / Height	280 C Baco Casters List Price	280 C Steel Casters List Price	280 Without Casters List Price	Shipping Weight
6	14″ to 19″			$ 11.50	25 lbs.
	17″ to 22″	$ 14.00	$ 12.70	11.50	28 lbs.
	20″ to 25″	14.50	13.20	12.00	28 lbs.

Catalog Page	Number / Description / Height	271 R.C.B. Baco Casters List Price	271 R.C.S. Steel Casters List Price	271 R Without Casters List Price	Shipping Weight
6	14″ to 19″	$ 16.50	$ 15.20	$ 14.00	29 lbs.
	17″ to 22″	16.50	15.20	14.00	29 lbs.
	20″ to 25″	17.00	15.70	14.50	30 lbs.

Catalog Page	Number / Description / Height	281 R.C.B. Baco Casters List Price	281 R.C.S. Steel Casters List Price	281 R Without Casters List Price	Shipping Weight
6	14″ to 19″			$ 9.00	24 lbs.
	17″ to 22″	$ 11.50	$ 10.20	9.00	27 lbs.
	20″ to 25″	12.00	10.70	9.50	27 lbs.

Catalog Page	Number / Description / Height	277 LC-PVR Baco Casters List Price	277 LC-PVR Steel Casters List Price	277 L-PVR Without Casters List Price	Shipping Weight
6	25″ to 30″	$ 21.50	$ 20.20	$ 19.00	30 lbs.
	30″ to 35″	21.50	20.20	19.00	30 lbs.
	32″ to 37″	22.00	20.70	19.50	31 lbs.

Any above Posture Chairs furnished with back rest 2½″ farther back at same list prices. Use Prefix B to designate this pattern.

Catalog Page	Catalog Number	Adjustable Height	List Price	Shipping Weight
6	20LC	17″ to 22″	$ 25.90	45 lbs.

REVOLVING AND ADJUSTABLE STOOLS

Catalog Page	Adjustable Height	STOOLS WITHOUT BACKS Catalog Number	List Price Each	Shipping Weight	STOOLS WITH WOOD BACKS Catalog Number	List Price Each	Shipping Weight
7	18″ to 23″	25	$ 9.50	14 lbs.	35B	$11.80	18 lbs.
	22″ to 27″		9.80	16 lbs.		12.10	20 lbs.
	26″ to 31″		10.10	17 lbs.		12.40	21 lbs.
7	26″ to 31″	25DS	10.40	18 lbs.	35DSB	12.70	22 lbs.
	30″ to 35″		10.70	19 lbs.		13.00	23 lbs.
	34″ to 39″		11.30	20 lbs.		13.60	24 lbs.
7	26″ to 31″	250DS	10.70	19 lbs.	350DSB	13.00	23 lbs.
	30″ to 35″	without	11.00	20 lbs.	without	13.30	24 lbs.
	34″ to 39″	foot rest	11.60	21 lbs.	foot rest	13.90	25 lbs.
7	No. 99 Adjustable Foot Rest, for any Stool or Chair, List each					$1.00	3 lbs.

See Back Page for Special Finishes

LIST PRICES ON DRAFTING ROOM STOOLS AND REVOLVING CHAIRS

Catalog Page	Height or Size	STOOLS WITHOUT BACKS			STOOLS WITH WOOD BACKS		
		Catalog Number	List Price Each	Shipping Weight	Catalog Number	List Price Each	Shipping Weight
7	26″ to 31″	251	$12.00	24 lbs.	252	$14.40	29 lbs.
	30″ to 35″		12.50	26 lbs.		14.90	31 lbs.
	34″ to 39″		13.00	27 lbs.		15.40	32 lbs.
7	26″	226	5.50	16 lbs.	227	7.40	21 lbs.
	28″		5.70	17 lbs.		7.60	22 lbs.
	30″		5.90	19 lbs.		7.80	24 lbs.
	32″		6.20	20 lbs.		8.10	25 lbs.
	34″		6.60	21 lbs.		8.50	26 lbs.
	36″		7.10	22 lbs.		9.00	27 lbs.
7	18″ to 23″				256	13.50	30 lbs.
	22″ to 27″					13.80	32 lbs.
	26″ to 31″					14.10	35 lbs.

LIST PRICES ON STRAIGHT & TABLET ARM CHAIRS

Catalog Page	Catalog Number	Height or Size	List Price Each	Shipping Weight
8	1018 with Wood Seat — Steel Back Rest	16″	$ 5.40	16 lbs.
		18″	5.70	17 lbs.
		20″	6.60	19 lbs.
		22″	7.20	20 lbs.
		24″	7.80	22 lbs.
		26″	8.40	23 lbs.
8	1018WB with Wood Seat — Wood Back Rest	16″	5.90	16 lbs.
		18″	6.20	17 lbs.
		20″	7.10	18 lbs.
		22″	7.70	20 lbs.
		24″	8.30	22 lbs.
		26″	8.90	23 lbs.
8	2016 with Leather Covered Seat and Back Rest	16″	9.90	20 lbs.
		18″	10.20	21 lbs.
		20″	11.10	23 lbs.
		22″	11.70	24 lbs.
		24″	12.30	25 lbs.
		26″	12.90	26 lbs.
8	3016 with Steel Seat and Back Rest	16″	5.40	16 lbs.
		18″	5.70	16½ lbs.
		20″	6.60	20 lbs.
		22″	7.20	22 lbs.
		24″	7.80	24 lbs.
		26″	8.40	26 lbs.
8	018 with Wood Seat — Steel Back Rest	16″	4.50	16 lbs.
		18″	4.70	17 lbs.
		20″	4.90	18 lbs.
8	1112WB with Two-Piece Wood Back	12″-13″-14″	2.67	9 lbs.
	1112 with One-Piece Wood Back	12″-13″-14″	2.67	8½ lbs.
8	1800 with Steel Back Rest	18″-17″-16″	7.00	30 lbs.
	1750 with Steel Back Rest	18″-17″-16″	6.50	25 lbs.
	1700 with Wood Back Rest	18″-17″-16″	6.50	25 lbs.

See Back Page for Special Finishes

LIST PRICES ON MISCELLANEOUS SEATING

Catalog Page	Catalog Number	Height or Size	List Price Each	Shipping Weight
9	7DT with Drawer and Tray	18″ or 20″	$ 6.40	14½ lbs.
		22″ or 24″	6.70	17 lbs.
9	7D with Drawer	18″ or 20″	5.40	11 lbs.
		22″ or 24″	5.70	14 lbs.
9	7T with Tray	18″ or 20″	5.20	11 lbs.
		22″ or 24″	5.50	14 lbs.
9	15-19 Adjustable	13″ to 19″	16.00	40 lbs.
	19-15 Rigid	16″	11.00	35 lbs.
9	213 with 2″ Steel Casters	12″	4.00	10 lbs.
		14″	4.60	11 lbs.
9	213 with 2″ Baco Casters	12″	5.30	10 lbs.
		14″	5.90	11 lbs.
9	13F with Foot Rest	20″-22″-24″	4.60	12 lbs.
		26″-28″-30″	5.10	14 lbs.
9	13 without Foot Rest	20″-22″-24″	3.60	10 lbs.
		26″-28″-30″	4.10	12 lbs.
9	27WB with Wood Back	16″-18″-20″	5.00	14 lbs.
		22″-24″-26″	5.60	16 lbs.
		28″ or 30″	6.30	18 lbs.
10	2216 Stool Chair	16″ or 18″	5.65	16 lbs.
		20″ or 22″	5.80	17 lbs.
		24″ or 26″	6.00	18 lbs.
		28″ or 30″	6.20	19 lbs.
		32″ or 34″	6.50	20 lbs.
10	1 W. S. Folding Wall Stool	14″ dia.	3.70	8 lbs.
10	3-18 BENCH SEAT	3′ long	8.00	36 lbs.
	4-18 BENCH SEAT	4′ long	11.00	45 lbs.
	5-18 BENCH SEAT	5′ long	12.00	50 lbs.
	6-18 BENCH SEAT	6′ long	15.00	60 lbs.
	8-18 BENCH SEAT	8′ long	20.00	70 lbs.

OFFICE SPECIALTIES

10	Rubber Seat Cushions	13″ dia.	$ 2.50	2 lb.
10	Sorting Tray, Letter Size	12″x12″x7″	4.25	5 lbs.
	Sorting Tray, Legal Size	12″x15″x7″	5.30	6 lbs.
10	Waste Paper Basket	11″x11″x15½″	2.00	12 lbs.

LIST PRICES ON STEEL DESKS AND STANDS

Catalog Page	Catalog Number	SIZE Wide	SIZE Deep	SIZE High	List Price Each	Shipping Weight
11	28 Foreman's Desk	34″	28″	44″–53″	$38.00	145 lbs.
	29 Foreman's Desk	34″	28″	44″–53″	44.00	160 lbs.
	38 Foreman's Desk	34″	28″	37½″–46½″	51.00	170 lbs.
	28-S Foreman's Desk	34″	28″	44″–53″	34.00	145 lbs.
	29-S Foreman's Desk	34″	28″	44″–53″	40.00	160 lbs.
	38-S Foreman's Desk	34″	28″	44″–	47.00	170 lbs.
	42-26RH Desk — Steel Top	42″	26″	30″	42.00	165 lbs.
	42-26RH Desk — Linoleum Top	42″	26″	30″	48.00	175 lbs.
	42-26LH Desk — Steel Top	42″	26″	30″	42.00	165 lbs.
	42-26LH Desk — Linoleum Top	42″	26″	30″	48.00	175 lbs.
	32-18 Typewriter Stand	32″	18″	26¼″	8.00	40 lbs.
	24-26DL With Two Drop Leaves	46″	17″	26″	22.50	50 lbs.
	24-26RL With Right Drop Leaf Only	35″	17″	26″	19.50	45 lbs.
	24-26LL With Left Drop Leaf Only	35″	17″	26″	19.50	45 lbs.

See Back Page for Special Finishes

OFFICE AND FACTORY TABLES

Catalog Page	Catalog Number	SIZE Wide	Deep	High	List Price Each	Shipping Weight
12	680 With Drawer	42″	26″	30″	$19.30	95 lbs.
	700 With Bottom Shelf and Drawer	42″	26″	30″	23.05	115 lbs.
	640 Without Drawer or Shelf	42″	26″	30″	15.20	80 lbs.
	660 Without Drawer — With Shelf	42″	26″	30″	18.95	100 lbs.
	Any of Above Tables Shipped Set-Up — Add to List Price				3.50	
	70 With Drawer and Shelf	42″	26″	30″	28.00	108 lbs.
	64 Without Drawer — Without Shelf	42″	26″	30″	18.00	95 lbs.
	66 With Shelf — Without Drawer	42″	26″	30″	23.00	105 lbs.
	68 With Drawer — Without Shelf	42″	26″	30″	24.00	110 lbs.
	60-2 With Drawers and Shelf	60″	30″	30″	48.00	173 lbs.
	61-2 With Drawers — Without Shelf	60″	30″	30″	42.00	160 lbs.
	84-42 LH Draftsman's Reference Table	84″	42″	35″	46.90	290 lbs.
	84-42 RH Draftsman's Reference Table	84″	42″	35″	46.90	290 lbs.
	84-42 Shipped Set-Up — Add to List Price				4.50	
	5KG Heavy Steel Table	144″	30″	30″	100.75	520 lbs.

MAILING TABLES

Cat. Page	Catalog Number	Article and Description All Shelves Removable	Compartments Total	Width	Height	Size of Table Width	Depth	Height	Size of Compartments Width	Depth	Height	List Price	Shipping Weight
13	3040	Mailing Table	16	4	4	41½″	33″	30″	10″	15″	2½″	$34.00	175 lbs.
	3040	Top only	16	4	4	41½″	15″	14½″	10″	15″	2½″	20.00	80 lbs.
	3040-12	Mailing Table	12	4	3	41½″	33″	30″	10″	15″	2½″	30.00	155 lbs.
	3040-12	Top Only	12	4	3	41½″	15″	11½″	10″	15″	2½″	16.00	60 lbs.
	3040-24	Mailing Table	24	4	6	41½″	33″	30″	10″	15″	2½″	46.00	180 lbs.
	3040-24	Top only	24	4	6	41½″	15″	20½″	10″	15″	2½″	32.00	100 lbs.
	3040-32	Mailing Table	32	4	8	41½″	33″	30″	10″	15″	2½″	60.00	225 lbs.
	3040-32	Top only	32	4	8	41½″	15″	26½″	10″	15″	2½″	40.00	145 lbs.
	3041-16	Mailing Table	16	4	4	41½″	33″	30″	10″	15″	2½″	50.00	187 lbs.
		Drawer on any Table, add to list							26″	22″	3½″	8.00	20 lbs.
		Lock on any Drawer, add to list										2.00	
	3060D	Mailing Table	36	6	6	61½″	33″	30″	10″	15″	2½″	86.00	300 lbs.
		Without Drawers, deduct from list										12.00	26 lbs.
	3060	Top Only	36	6	6	61½″	15″	20½″	10″	15″	2½″	48.00	170 lbs.
	3060-72D	Mailing Table	72	6	12	61½″	33″	30″	10″	15″	2½″	133.00	325 lbs.
	3060-72	Top Only	72	6	12	61½″	15″	38½″	10″	15″	2½″	93.00	195 lbs.
	3260EDS	Mailing Table	48	8	6	60″	30″	59″				89.00	310 lbs.
		Without Drawers, deduct from list										8.20	20 lbs.
	3260	Top Only	48	8	6	60″	12″	29″				60.00	180 lbs.
		(Price on Mailing Tables includes label holders)											

STEEL CABINETS

Catalog Page	Catalog Number	Overall Size Wide	Deep	High	List Price Each	Shipping Weight
14	36 Cabinet	24″	16″	69½″	$112.00	315 lbs.
	28-20 Cabinet	22½″	18½″	51″	100.00	285 lbs.
	Cabinets Without Casters, Deduct			2¾″	2.40	
	210 Storage Cabinet	36⅛″	24″	78″	50.00	300 lbs.
	212 Storage Cabinet	36⅛″	18″	78″	44.00	268 lbs.
	213 Storage Cabinet	36⅛″	15″	78″	41.75	255 lbs.
	214 Storage Cabinet	36⅛″	12″	78″	39.50	225 lbs.
	18-24 Cabinet with drwr. dividers	26½″	18½″	51″	120.00	290 lbs.
	18-24 Cabinet without drwr. dividers	26½″	18½″	51″	110.00	278 lbs.
	12-12BL Cabinet — With Locking Bar	14½″	18½″	40″	58.00	148 lbs.
	12-12 Cabinet — Without Locking Bar	14½″	18½″	40″	50.00	140 lbs.
	230 Counter High Cabinet	36⅛″	18″	42″	30.50	170 lbs.
	232 Counter High Cabinet	36⅛″	24″	42″	35.30	190 lbs.
14	Extra shelves for Nos. 210 or 232				2.50	16 lbs.
	Extra shelves for Nos. 212 or 230				2.10	12 lbs.
	Extra shelves for Nos. 213 or 214				1.95	10 lbs.
15	3875 Cabinet	25¾″	10½″	43½″	86.00	170 lbs.
	16-16 Parts Cabinet	35½″	12″	28¾″	80.00	185 lbs.
	3-30 Three Drawer Cabinet	30¼″	15″	8⅞″	19.00	50 lbs.
	6-42-30 Blue Print Cabinet	44½″	30½″	33½″	99.00	400 lbs.
	6-10 Cabinet Without Trays	24″	15½″	13½″	21.00	87 lbs.
	Trays for 6-10 Cabinet	9⅞″	14½″	1″	2.00	2½ lbs.
	36-24 Tool Cabinet	24″	16″	36″	24.00	92 lbs.

See Back Page for Special Finishes

LIST PRICES OF STEEL BENCH LEGS

Catalog Page	Catalog Number	Height or Size	List Price Each	Shipping Weight
16	29-23 Bench Leg Top length — 23″ Top width — 2″	29″	$2.40	13½ lbs.
		30″	2.40	13½ lbs.
		31¼″	2.60	14 lbs.
		32″	2.60	14 lbs.
		34″	2.80	15 lbs.
16	2-26 Bench Leg Top length — 26″ Top width — 2⅞″	29″	3.00	18 lbs.
		30″	3.00	18½ lbs.
		31¼″	3.20	19 lbs.
		32″	3.20	19½ lbs.
		34″	3.50	20 lbs.
16	3-30 Bench Leg Top length — 30″ Top width — 3⅜″	29″	3.40	22 lbs.
		30″	3.40	22½ lbs.
		31¼″	3.70	23 lbs.
		32″	3.70	23½ lbs.
		34″	4.20	24 lbs.
16	8-26 Bench Leg Top length — 26″ Top width — 2⅞″	29″	3.80	23½ lbs.
		30″	3.80	24 lbs.
		31¼″	4.10	24½ lbs.
		32″	4.10	25 lbs.
		34″	4.60	25½ lbs.
16	4-26 Bench Leg Top length — 26″ Top width — 2⅞″	29″	3.40	21 lbs.
		30″	3.40	21½ lbs.
		31¼″	3.70	22 lbs.
		32″	3.70	22½ lbs.
		34″	4.20	23 lbs.
16	5-26 Bench Leg Top length — 26″ Top width — 5″	29″	4.20	21 lbs.
		30″	4.20	21 lbs.
		31¼″	4.50	21½ lbs.
		32″	4.50	21½ lbs.
		34″	5.00	22 lbs.
16	5-36 Bench Leg Top length — 36″ Top width — 5″	29″	5.90	24 lbs.
		30″	5.90	24 lbs.
		31¼″	6.20	24½ lbs.
		32″	6.20	24½ lbs.
		34″	6.70	25 lbs.
16	9-26 Bench Leg Top length — 26″ Top width — 5″	29″	4.70	25 lbs.
		30″	4.70	25 lbs.
		31¼″	5.00	26 lbs.
		32″	5.00	28 lbs.
		34″	5.50	30 lbs.

STEEL BENCH DRAWERS

Catalog Page	Catalog Number	Inside Size			List Price Each	Shipping Weight
		Wide	Deep	High		
17	1218 — Bench Drawer	12″	18″	4″	$ 3.00	14½ lbs.
	1618 — Bench Drawer	16″	18″	4″	3.50	15½ lbs.
	2018 — Bench Drawer	20″	18″	5″	5.00	18 lbs.
	Above Drawers with Sliding Tray, Add	to the list			.60	1½ lbs.
	1218PCT — Bench Drawer with Tray	12″	18″	4″	5.00	18½ lbs.
	1618PCT — Bench Drawer with Tray	16″	18″	4″	5.50	21 lbs.
	2018PCT — Bench Drawer with Tray	20″	18″	5″	7.00	25½ lbs.
	Above Drawers without Tray, Deduct f	rom List			.60	1½ lbs.
	For Lock and 2 Keys on Any Bench Dr	awer, Add	to List		1.30	
17	8 — Tool Box	19¼″	7⅛″	8⅛″	5.50	12½ lbs.
17	22-84 — Iron Bar Rack	21″	21″	84″	20.00	85 lbs.

STEEL WORK BENCHES

Catalog Number	Size			List, complete with top, turned up ends and back; shelf; legs and one drawer		Without 2018PCT drawer, deduct List	Without Shelf, but with lower angle brace, deduct		Without ends, deduct	Without turned up back, deduct	For every Leg left out of units, deduct	
	Width	Depth	Height, Top to Floor	List Price	Shipping Weight		List Price	Shipping Weight	List Price	List Price	List Price	Shipping Weight
48-24	4′	24″	30″	$35.00	180 lbs.	$7.00	$4.10	20 lbs.	$1.50	$1.50	$3.50	21 lbs.
	4′	24″	32″	35.10	182 lbs.	7.00	4.10	20 lbs.	1.50	1.50	3.55	22 lbs.
	4′	24″	34″	35.20	184 lbs.	7.00	4.10	20 lbs.	1.50	1.50	3.60	23 lbs.
	4′	24″	36″	35.40	186 lbs.	7.00	4.10	20 lbs.	1.50	1.50	3.70	24 lbs.
48-30	4′	30″	30″	37.00	205 lbs.	7.00	5.00	30 lbs.	2.00	1.50	3.60	22 lbs.
	4′	30″	32″	37.10	207 lbs.	7.00	5.00	30 lbs.	2.00	1.50	3.65	23 lbs.
	4′	30″	34″***	37.20	208 lbs.	7.00	5.00	30 lbs.	2.00	1.50	3.70	24 lbs.
	4′	30″	36″	37.40	210 lbs.	7.00	5.00	30 lbs.	2.00	1.50	3.80	25 lbs.
60-24	5′	24″	30″	38.00	210 lbs.	7.00	5.00	27 lbs.	1.50	1.75	3.50	22 lbs.
	5′	24″	32″	38.10	212 lbs.	7.00	5.00	27 lbs.	1.50	1.75	3.55	23 lbs.
	5′	24″	34″	38.20	214 lbs.	7.00	5.00	27 lbs.	1.50	1.75	3.60	24 lbs.
	5′	24″	36″	38.40	216 lbs.	7.00	5.00	27 lbs.	1.50	1.75	3.70	25 lbs.
60-30	5′	30″	30″	41.00	235 lbs.	7.00	6.00	39 lbs.	2.00	1.75	3.60	22 lbs.
	5′	30″	32″	41.10	237 lbs.	7.00	6.00	39 lbs.	2.00	1.75	3.65	23 lbs.
	5′	30″	34″***	41.20	239 lbs.	7.00	6.00	39 lbs.	2.00	1.75	3.70	24 lbs.
	5′	30″	36″	41.40	242 lbs.	7.00	6.00	39 lbs.	2.00	1.75	3.80	25 lbs.
72-24	6′	24″	30″	41.50	230 lbs.	7.00	6.25	32 lbs.	1.50	2.10	3.50	21 lbs.
	6′	24″	32″	41.60	232 lbs.	7.00	6.25	32 lbs.	1.50	2.10	3.55	22 lbs.
	6′	24″	34″	41.70	234 lbs.	7.00	6.25	32 lbs.	1.50	2.10	3.60	23 lbs.
	6′	24″	36″	41.90	237 lbs.	7.00	6.25	32 lbs.	1.50	2.10	3.70	24 lbs.
72-30	6′	30″	30″	45.50	260 lbs.	7.00	7.50	47 lbs.	2.00	2.10	3.60	22 lbs.
	6′	30″	32″	45.60	262 lbs.	7.00	7.50	47 lbs.	2.00	2.10	3.65	23 lbs.
	6′	30″	34″***	45.70	264 lbs.	7.00	7.50	47 lbs.	2.00	2.10	3.70	24 lbs.
	6′	30″	36″	45.90	267 lbs.	7.00	7.50	47 lbs.	2.00	2.10	3.80	25 lbs.

***Indicates the most popular sizes.

For Locks and 2 Keys on Drawers, Add to List, $1.30.

One Bench Leg and one Pair of Ends is left out every time an additional bench is used in a continuous unit.

MACHINE TENDERS AND TRUCKS

Catalog Page	Catalog Number	Overall Size			List Price Each	Shipping Weight
		Wid e	Deep	High		
18	216 — With Drawer	20″	20″	36″	$14.00	71 lbs.
	For 2″ Steel Casters, Add to List				1.40	
	For 2½″ Steel Casters, Add to List				2.40	
	216 — Without Drawer, Deduct List				4.00	9 lbs.
18	218DC — With Drawer and Casters	24″	18″	35″	21.00	84 lbs.
	218DC — Without Lock, Deduct List				1.50	
	218C — Without Drawer, with Casters	24″	18″	35″	16.00	75 lbs.
	Above with 2½″ Steel Casters, Add to List				1.00	
	Above Without Casters, Deduct List			3″	1.40	2 lbs.
18	217CH — Without Drawer	24″	18″	35″	17.00	79 lbs.
	217CH — With Drawer, Add to List				6.00	9 lbs.
	Lock on Drawer, Add to List				1.50	
18	10G — Portable Work Bench	36″	20¾″	36″	50.00	216 lbs.
18	18-34 — With Two Shelves	24″	18″	34″	12.00	75 lbs.
	18-33 — With Three Shelves	24″	18″	34″	14.50	85 lbs.
18	48-24-50 — Low Bed Truck	48″	24″	50″	62.00	192 lbs.

LIST PRICES ON STEEL TRUCKS

For our customer's convenience we have priced our line of Steel Trucks with two grades of casters, namely, Type "A" and Type "B".

Type "A" caster is the most serviceable and durable caster. We recommend this caster for extra duty work with loads of 1200 to 1800 lbs.

Type "B" is a very good grade caster and will give excellent service under ordinary conditions, with loads of 1000 lbs. or less.

BE SURE TO SPECIFY THE TYPE CASTERS YOU DESIRE. "A" type are furnished unless otherwise specified.

Catalog Page	Catalog Number	SIZE			List Price Each With "B" Type Casters 3" dia. swivel and rigid casters	List Price Each With "A" Type Casters 3" dia. swivel casters 4" dia. rigid casters	Shipping Weight
		Long	Wide	High			
19	3020A	30"	20"	6½"	$11.40	$18.20	40 lbs.
	3620A	36"	20"	6½"	11.55	18.35	41 lbs.
	4020A	40"	20"	6½"	11.65	18.45	42 lbs.
	4024A	40"	24"	6½"	11.85	18.65	43 lbs.
	4624A	46"	24"	6½"	12.00	18.80	46 lbs.

Catalog Page	Catalog Number	SIZE			List Price Each With 5" dia. "B" type casters, two swivel and two rigid. 16 ga. bed plate 16 ga. backs and ends where shown in catalog	List Price Each With 5" and 6" dia. "A" type casters 12 ga. bed plate 16 ga. backs and ends where shown in catalog	Shipping Weight
		Long	Wide	High			
19	3020B	30"	20"	18"	$27.10	$32.20	75 lbs.
	3620B	36"	20"	18"	27.85	33.00	93 lbs.
	4020B	40"	20"	18"	28.50	33.70	99 lbs.
	4024B	40"	24"	18"	29.15	34.40	104 lbs.
	4624B	46"	24"	18"	29.80	35.10	125 lbs.
19	3020C	30"	20"	42"	27.70	32.80	86 lbs.
	3620C	36"	20"	42"	28.45	33.60	98 lbs.
	4020C	40"	20"	42"	29.10	34.30	110 lbs.
	4024C	40"	24"	42"	29.75	35.00	116 lbs.
	4624C	46"	24"	42"	30.40	35.70	125 lbs.
19	3020D	30"	20"	35"	30.60	35.70	101 lbs.
	3620D	36"	20"	35"	31.35	36.50	111 lbs.
	4020D	40"	20"	35"	32.00	37.20	121 lbs.
	4024D	40"	24"	35"	32.65	37.90	130 lbs.
	4624D	46"	24"	35"	33.30	38.60	139 lbs.
19	3020E	30"	20"	35"	32.95	38.00	97 lbs.
	3620E	36"	20"	35"	33.70	38.80	103 lbs.
	4020E	40"	20"	35"	34.35	39.50	120 lbs.
	4024E	40"	24"	35"	35.00	40.20	132 lbs.
	4624E	46"	24"	35"	35.65	40.90	140 lbs.
19	3020F	30"	20"	35"	35.15	40.20	100 lbs.
	3620F	36"	20"	35"	35.90	41.00	112 lbs.
	4020F	40"	20"	35"	36.55	41.70	127 lbs.
	4024F	40"	24"	35"	37.20	42.40	139 lbs.
	4624F	46"	24"	35"	37.85	43.10	147 lbs.

See Price List Page 12 for Caster Changes

STEEL TRUCKS

Catalog Page	Catalog Number	SIZE Long	SIZE Wide	SIZE High	Size of Casters	List Price With B Type Casters	List Price With A Type Casters	Shipping Weight
20	74–61 — High End Truck	61″	18″	73″	5″	$23.00	.....	160 lbs.
	3620–33 — Die Truck	36″	20″	33″	5″	.....	$35.00	120 lbs.
	24–24–40 — Box Truck	40″	24″	24″	5″–6″	.....	40.00	162 lbs.
	4 O. B. — Open Back Bus	39¾″	20¼″	42″	5″	54.25	.....	236 lbs.
	4 C. B. — Closed Back Bus	39¾″	21″	42″	5″	66.25	.....	243 lbs.
	36–36–36 — Excelsior Truck	41″	39″	43″	4″	76.00	.....	277 lbs.
	36–24–24 — Box Truck	36″	24″	24″	5″	32.00	.....	120 lbs.

LIST PRICES FOR CASTER CHANGES ON TRUCKS

TRUCKS EQUIPPED WITH 5″ DIA. "B" TYPE CASTERS:	
For 4″ dia. Semi-steel wheels, plain bearing axles, deduct from list	$ 4.70
For 4″ dia. Semi-steel wheels, Roller bearing axles, add to list	3.60
For 4″ dia. Ruberex wheels, plain bearing axles, deduct from list	.15
For 4″ dia. Ruberex wheels, Roller bearing axles, add to list	8.00
For 5″ dia. Semi-steel wheels, Roller bearing axles, add to list	9.20
For 5″ dia. Ruberex wheels, plain bearing axles, add to list	6.85
For 5″ dia. Ruberex wheels, Roller bearing axles, add to list	15.30
TRUCKS EQUIPPED WITH 5″ & 6″ DIA. "A" TYPE CASTERS:	
For 4″ & 5″ dia. Semi-steel wheels, plain bearing axles, deduct from list	2.65
For 4″ & 5″ dia. Semi-steel wheels, Roller bearing axles, add to list	3.45
For 4″ & 5″ dia. Rubber tired wheels, plain bearing axles, add to list	3.85
For 4″ & 5″ dia. Rubber tired wheels, Roller bearing axles, add to list	10.00
For 5″ & 6″ dia. Semi-steel wheels, Roller bearing axles, add to list	5.35
For 5″ & 6″ dia. Rubber tired wheels, plain bearing axles, add to list	8.60
For 5″ & 6″ dia. Rubber tired wheels, Roller bearing axles, add to list	14.70

KNITTING & TEXTILE MILL EQUIPMENT

Catalog Page	Catalog Number	Size Wide	Size Deep	Size High	List Price Each	Shipping Weight
21	24-24 — Bar Topping Table	24″	24″	30½″	$ 34.00	105 lbs.
	24-24 D — Double Bar Topping Table	24″	36″	30½″	54.60	135 lbs.
	36-12 — Knitter's Cabinet, Steel or Linoleum Top, optional	36″	14″	42″	44.00	140 lbs.
	36-12 — Knitter's Cabinet, Stainless Steel Top	36″	14″	42″	56.00	140 lbs.
	42-72 — Matching and Pairing Table	72″	42″	36″	$39.05	195 lbs.
	34-34 S — Hosiery Rack single	36¼″	35″	104″	46.70	160 lbs.
	34-34 D — Hosiery Rack double	36¼″	70″	104″	104.60	400 lbs.
	30-30 S — Hosiery Rack single	32¼″	31″	104″	45.60	150 lbs.
	30-30 D — Hosiery Rack double	32¼″	62″	104″	102.10	380 lbs.
	60-36-34 — Knitter's Examining Table	60″	36″	34″	60.30	180 lbs.
	27-17-16 — Knitter's Box	27″	17″	22″	11.50	45 lbs.

MISCELLANEOUS STEEL EQUIPMENT

22	100 — Pigeonhole Cabinet	32½″	6″	37″	$ 50.00	75 lbs.
	019 — Bank Vault Step	18″	15″	18½″	8.00	36 lbs.
	20 — Bank Vault Step, Steel steps	19″	20″	20″	10.00	35 lbs.
	22 — Bank Vault Step, Linoleum covered steps	19″	20″	20″	15.00	38 lbs.
	88 — Drill and Reamer Cabinet	33¼″	17¾″	47″	44.00	125 lbs.
	Check Hooks for No. 88 Cabinet	.....	.....	.....	2.60	
	108 — Drill and Reamer Cabinet	35½″	17¾″	38″	52.00	150 lbs.
	Check Hooks for No. 108 Cabinet	.....	.....	.....	2.80	
	160 — Waste Can	16″	16″	29″	13.20	55 lbs.
	180 — Waste Can	18″	18″	31″	16.80	62 lbs.

LIST PRICES OF EXTRA PARTS

Catalog Number	DESCRIPTION	Size	LIST PRICE Finished	LIST PRICE Unfinished
	WOOD SEATS			
1,100 etc.	Birch wood stool seat	14″ dia. x 1 1/16″	$1.30	$1.20
1018 etc.	Birch wood saddle seat	14 1/2″ x 14 1/2″ x 1 1/16″	2.10	2.00
1112	Kindergarten saddle seat	12″ x 10 1/2″ x 1 1/16″	1.50	1.40
276 & 280	Posture chair, dished wood seat	16″ x 12″ x 1 1/16″	2.30	2.20
15-19 & 19-15	Linotype Operator's saddle seat	17 1/2″ x 15 1/2″ x 1 1/16″	2.60	2.40
	UPHOLSTERED SEATS			
1,100,25 etc.	Padded and Genuine leather covered	14″ dia.	4.50	
2016	Padded and Genuine leather covered	14 1/2″ x 14 1/2″	4.35	
276L & 280L	Padded, Genuine leather covered, with attachments	16″ x 12″	5.10	
20L	Padded and Genuine leather covered	18″ x 16″	5.85	
	STEEL SEATS			
4,40 etc.	16 ga. steel seat	13″ dia.	.90	.80
5	16 ga. steel seat	15″ dia.	1.30	1.20
3016	16 ga. Perforated chair seat	14 1/2″ x 14 1/2″	2.10	2.00
	WOOD BACKS			
	Curved wood back rest only	6″ x 14″ x 3/4″	.90	.70
111WB	Curved wood back rest, with pillars and fasteners	6″ x 14″ x 3/4″	1.95	1.85
35B	Curved wood back rest, with pillars and fasteners	6″ x 14″ x 3/4″	2.40	2.20
276 & 280	Posture chair, veneer back rest, with attachments	5″ x 13″ x 1/2″	1.50	1.30
	UPHOLSTERED BACKS			
	Padded and Genuine leather covered back rest only	6″ x 14″	3.20	
526LB	Padded, Genuine leather, pillars and fasteners	6″ x 14″	4.25	
276L & 280L	Padded, Genuine leather covered, with attachments	5″ x 13″	3.90	
	STEEL BACKS			
11	Steel back, with pillars and fasteners	6″ x 12″ x 16 ga.	1.45	1.35
66	Steel back, complete for three legged stools	6″ x 9″ x 16 ga.	1.10	1.00
55	Steel back, with pillars and fasteners	6″ x 14″ x 16 ga.	1.65	1.45

	MISCELLANEOUS	List Price
	Back fasteners, set or pair complete	$ .45
	On any Stool or Chair, 2″ dia. steel wheel casters, extra	1.20
	On any Stool or Chair, 2″ dia. Baco wheel casters, extra	2.50
	On any Stool or Chair, No. 17 Rubber tips, set of 4, extra	.40
	On any Stool or Chair, 7/8″ dia. glides, not attached, extra	.28
	On any Stool or Chair, 7/8″ dia. glides, attached, extra	.60
	On any Table or Stand, 2″ dia. steel wheel casters, extra	1.40
	On any Table or Stand, 2″ dia. Baco wheel casters, extra	3.00
	On any Table or Stand, 3″ dia. Baco wheel casters, extra	5.00
	On any Table or Stand, No. 19 or 20 Rubber tips, set of 4, extra	.50
	On any Table or Desk, Paracentric lock, with two keys extra	2.00
	Revolving stool Spider and screw complete with handwheel and washer	2.20
	Revolving stool Spider and screw only	1.80
	Revolving stool Hub only	1.20
	EXTRA PRICES FOR SPECIAL FINISHES	
	Any Stool or Chair, White Enamel finish, extra	20%
	Any Stool or Chair, Grey or Plain Mahogany, not grained, extra	15%
	Cabinets, Tables & large equipment, White Enamel finish, extra	15%
	Cabinets, Tables & large equipment, Grey, Plain Mahogany or Plain Walnut Brown, not grained, extra	10%

Discounts Apply to All List Prices

C. E. PIPP, PRES. & GEN. MGR. A. R. PIPP, VICE PRES.

Angle Steel Stool Company

ROLNICK STEEL EQUIPMENT CO
(ANGLE STEEL STOOL SALES CO.)
N. Y. & N. J. DISTRIBUTORS
98-100 PARK PLACE
NEW YORK
PHONES BARCLAY 7-5559--60

ANGLE STEEL and SHEET FOR FACTORY

METAL EQUIPMENT SHOP and OFFICE

Please address all communications to NEW YORK CITY OFFICE

PLAINWELL, MICHIGAN

CUSTOMER'S QUANTITY DISCOUNT SHEET NO. 437C

NOTE: ADD 5% TO ALL LIST PRICES BEFORE FIGURING DISCOUNT
EFFECTIVE APRIL 1, 1937.

General Line:
Stools,chairs,all kinds,seat cushions,plant markers, tote boxes,lathe chip pans,galley trays and drawers.

1 to 3 inclusive	.....	30%
4 to 12 "	.....	35%
13 to 50 "	.....	40%
51 to 150 "	.....	40-5%
151 to 300 "	.....	40-10%
Over 300 "	.....	40-10-5%

Bench legs,bench drawers,steel horses,work benches. (all 1 kind or assorted)

1 to 6 inclusive	.....	35%
7 to 12 "	.....	40%
13 to 50 "	.....	40-5%
51 to 100 "	.....	40-10%

General Line:
Bench seats,sorting trays,racks,stands,desks,cabinets,pigeon hole sections,bins,bank vault steps,tables,drying racks,iron bar racks, costumers,waste cans,baskets,shelving & knitters's equipment.

1 to 6 inclusive	.....	35%
7 to 12 "	.....	40%
13 to 25 "	.....	40-5%

Machine tenders,trucks,busses.

1 to 6 inclusive	.....	40%
7 to 12 "	.....	40-5%
13 to 25 "	.....	40-10%

Write for special prices on larger quantities than listed.

TERMS: 30 days net 2% 10 days from date of invoice.
F.O.B.Plainwell Mich.

Save with Steel

WE ARE STEEL EQUIPMENT PEOPLE!

ANGLE STEEL STOOL COMPANY

YOUR SOURCE OF SUPPLY
FOR
STEEL EQUIPMENT

PLAINWELL, MICHIGAN
U. S. A.

ROLNICK STEEL EQUIPMENT CO.
(ANGLE STEEL STOOL SALES CO.)
N. Y. & N. J. DISTRIBUTORS
98-100 PARK PLACE
NEW YORK
PHONES BARCLAY 7-5359--60

DESKS
STOOLS
TABLES
TRUCKS
CABINETS
BENCH LEGS
WASTE CANS
WORK BENCHES
IRON BAR RACKS
POSTURE CHAIRS
BENCH DRAWERS
MACHINE TENDERS
BANK VAULT STEPS
PIGEONHOLE UNITS
TYPEWRITER STANDS
DRILL AND REAMER BINS
SPECIAL EQUIPMENT BUILT TO ORDER

ANGLE STEEL EQUIPMENT

ECONOMICAL — SANITARY — DURABLE

Upholstered Back Rest — Form fitting; 13″ wide by 5″ high, padded and covered with genuine leather.

Adjustable Back Rest—Adjustable in height and tilt by means of a single handwheel.

Upholstered Seat — Roll front seat 16″ wide by 14″ deep. Curled hair pads covered with genuine leather.

Adjustable Seat — Adjustable forward or backward in relation to back rest. Seat height adjustable 17″ to 22″ from floor.

Rigid Construction — Angle steel frame well braced, riveted and welded for strength.

Finish — Choice of green, light walnut brown, or dark mahogany brown leather with frame to match.

No. 276 LC-PVR Posture Chair

ROLNICK STEEL EQUIPMENT CO.
Angle Steel Stool Sales Co.
New York and New Jersey Distributors
98-100 Park Place, New York
Phone: Barclay 7-5559----7-5560

ANGLE STEEL STOOL COMPANY

Manufacturers of

Angle Steel and Sheet Metal Equipment

for Factory, Office, Shop, and School

PLAINWELL, MICHIGAN

Please address all communications to
NEW YORK CITY OFFICE

NO. 16-1-38

No. 276 L.C.-PVR
Posture Chair

No. 20 L.C. Chair

No. 281 RCB
Posture Chair

POSTURE

Angle Steel Posture C
posture principle with sim

They adjust to your re
mum of effort. Back rest
handwheel. Seats quick
backward in relation to b
adjustments are permane
changed.

Upholstered patterns
covered with long weari
selection of colors.

No. 1018 Chair

No. 440DS Stool

No. A 111 WB
Adjustable-Legged
Stool

No. 213 F

No. 28-S
Foreman's Desk

No. 680 Steel Table

No. 212 St

ce in Steel

E CHAIRS

Chairs combine the true
mplicity of adjustment.

requirements with a mini-
t controlled with a single
kly adjusted forward or
back rest. Best of all the
ent until you want them

have curled hair pads
ing genuine leather in a

No. 280 Posture Chair

No. 271 R.C.B. Posture Chair

No. 277L-PVR Posture Chair

Filing Stool

No. 111 WB
Adjustable-Legged Stool

No. 110 Stool

No. 1700 Tablet Arm Chair

torage Cabinet

No. 700 Steel Table

No. 3260 EDS Mailing Table

No. 36-24-24 Box Truck

No. 218-C
Machine Tender

No. 15-19 Linotype Operator's Chair

No. 3020D Truck

No. 36-24 Tool Cabinet

No. 14-12M Matrix Cabinet



No. 1218 PCT Bench Drawer

No. 28-20 Electro Cabinet

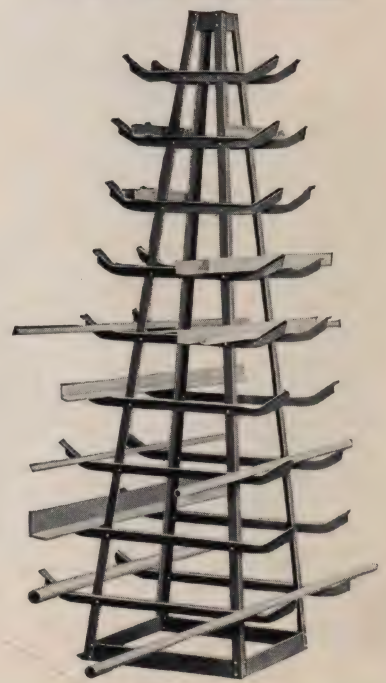

No. 22-84 Iron Bar Rack

No. 8-26
Bench Leg

No. 5 K. G. Heavy Steel Table

PLAIN STEEL SEAT AND BACK

THE 330 SERIES

Plain steel seat and back. Height of seat 16¾"
(see back page for complete specifications).

A practical, all steel chair without the cane perforations. An economical chair for a wide variety of public seating uses.

Number	Frame Color
332	Black
333	Flat Mahogany
334	Flat Walnut
335	Dark Green

FINISH

All Lyon Chairs are finished with a lasting coat of enamel, baked-on at high temperature. This finish is exceptionally durable and will resist chipping, cracking or scratching for many years.

STACKING

When not in use, Lyon Steel Folding Chairs may be conveniently stacked out of the way, or stacked on a truck and moved into a storeroom.

ROLNICK STEEL EQUIPMENT CO.

98-100 PARK PLACE Phones Barclay 7-5559-60 NEW YORK, N. Y.

WHY 11 REASONS THE *Lyon* CHAIR . .

1. Is More Comfortable
2. Will Give Years and Years of Service
3. Is the Safest Chair Made
4. Has Permanent Good Appearance



SAVES SPACE

Because the Lyon Chair folds flat and stacks compactly like books, much space is saved in storage.

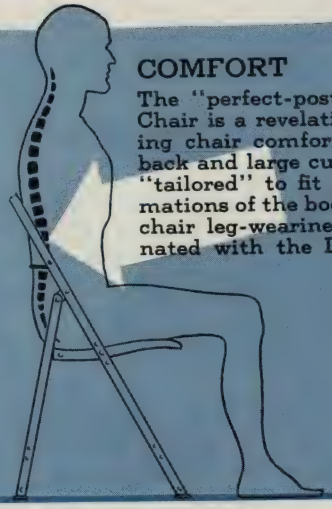

COMFORT

The "perfect-posture" Lyon Chair is a revelation in folding chair comfort. Formed back and large curved seat is "tailored" to fit the conformations of the body. Folding chair leg-weariness is eliminated with the Lyon Chair.

ROOMY

A wide, deep seat, accommodates the largest person with room to spare—15 5/16" wide, 14 1/2" deep.



TEAR PROOF

The sheerest of hose is safe from injury. There are no sharp edges on the Lyon Chair. Complaints resulting from injured fingers or clothing damage are eliminated with the safe Lyon Chair.

STRENGTH

Formed channel frame of 14 ga. high carbon steel for greatest strength. Four leg construction more attractive, easy to keep clean.

Construction Specifications

Width overall 16 5/8" without arms, 21 3/8" with arms, height overall open 31", folded 35". Thickness when folded approximately 2 1/4" per chair. Clear width of seat 15 5/16", depth 14 1/2", height of plain steel or cane steel seat 16 3/4" to highest point — upholstered or wood seat 17" to highest point.

Frame and rear legs from framed channel 15/16" x 1/2" x 14 USS ga. high carbon steel. Plain steel or cane steel back formed to give greatest support from No. 22 USS ga. cold rolled steel. Upholstered back formed from No. 24 ga. USS steel. Seats made from one piece No. 19 USS ga. cold rolled steel reinforced on the sides with 1" x 12 ga. canti-lever braces and 7/8" x 14 ga. cross reinforcement. All seats curved formation for maximum comfort. Wood seat made from 3 ply clear birch formed to fit over and supported by steel base underneath; held in place by bolts. Upholstered seats, on frame, are bolted to steel seat with concealed screws. Front and rear legs securely braced with No. 12 ga. x 1 1/2" embossed band. Live rubber feet for all four legs, easily replaced. Entire chair has only three moving parts.

All steel parts thoroughly cleaned and free from scale. Finished with high-grade enamel baked-on at 300° temperature.

LONG LIFE

Extra years of life are assured due to the "reserve" strength in Lyon Chairs, which will support, with an ample margin of safety, 700 lbs. of distributed weight.

SAFE

Fingers are safe. The Lyon hinge is positively pinch-proof.

NON-TIP

The safety and life of the Lyon Chair is further assured by front and rear 12 gauge 1 1/2" band reinforcements, embossed to enhance appearance.



EXTRA WEAR

There is extra wear in the 3 ply clear birch seat because it fits over and is supported 100% by the steel base underneath. Without this type of construction, wood seats are vulnerable to frequent seat breakage.

ECONOMY

There is extra economy in the Lyon Chair due to the fact that the comfortable upholstered seat is easily replaced should it eventually become soiled or accidentally damaged.

FLOORS PROTECTED

Live rubber feet, standard on all four legs, protects floors, prevents slipping. Easily replaced.

No. 835-C-R

Lyon Metal Products, Inc., Aurora, Illinois

Printed in U.S.A. 1-38 W-H

NEW, MODERN

STEEL LOCKERS

FEATURES

Twist-proof frame of 1/8" steel angles and channels.

Heavy 16 gauge door that won't sag or "spring."

"Torpedo-type" concealed-pin hinges.

Handle that prevents padlocks marring door front and that can't be used as towel or coat hook.

TYPICAL LOCKERS

No. 9000 12x12x60" Single Tier Locker, Olive Green

No. 9000 12x15x60" Single Tier Locker, Olive Green.

No. 9001 12x12x36" Double Tier Locker, Olive Green.

No. 9001 12x15x36" Double Tier Locker, Olive Green

For All Building Types

Built sturdy to stand the abuse of industrial service, silent-operating to fit quietly into hospital use, smooth and beautiful to harmonize with the beauty of modern schools and public buildings, A-S-E lockers are truly designed for all building types.

They can be used free standing on 6" legs, closed steel bases, in single rows or double rows, with flat or sloping tops. They can be recessed in walls or installed on tile or concrete bases. However they are used, they will give years of faithful, trouble-free service.

You can get A-S-E lockers in any quantity, from single units up. Invest for your building—now!

A-S-E No. 9000
Single Tier Locker

A-S-E No. 9001
Double Tier Locker

ROLNICK STEEL EQUIPMENT CO.
(ANGLE STEEL STOOL SALES CO.)
N. Y. & N. J. DISTRIBUTORS
98-100 PARK PLACE
NEW YORK
PHONES BARCLAY 7-5559--60

LS-1 KP 5-37 25M

PRINTED IN U.S.A.

Hamilton Trucks

WAREHOUSE AND FACTORY TRUCKS OF EVERY DESCRIPTION

BERWICK STEEL EQUIPMENT CO.
(ANGLE STEEL STOOL SALES CO.)
N. Y. & N. J. DISTRIBUTORS
98-100 PARK PLACE
NEW YORK
PHONES BARCLAY 7-6859--60

Hamilton builds a complete line of floor trucks of which a few prominent models are shown here.

ZERINGS PERFECTION · WORLDS' STANDARD OF QUALITY · HAND PROPELLED VEHICLES

Formerly known as Zering Trucks

Hamilton Trucks for E

FIGURE 907

HEAVY DUTY TERMINAL TRUCK

Figure 907—A popular truck for railroad terminals, steamship docks, warehouses and factories for handling loads up to 3 tons. Frame and platform built of extra heavy oak insuring long life. All corners are carefully rounded and re-enforced, and the ends are fully steel bound. Steel clips are placed on all bolsters to protect the wood from splitting. All wheels are fully equipped with roller bearings, and casters are double race, adjustable ball bearing type.

FIGURE 15

WAREHOUSE AND FACTORY TRUCK

Figure 15—This truck is of similar construction to Figure 907 except that it is built for somewhat lighter capacities—loads up to 3,000 pounds. The heavy cross rails are tenoned, mortised and bolted to the side rails.

GENERAL UTILITY TRUCK

Figure 840—For easy and quick movement of medium size loads this truck has no equal. It is constructed of the same high quality material as other Hamilton trucks, and is used for many diversified purposes. The casters on this truck are the standard Hamilton end thrust, ball bearing, stem type.

ROLNICK STEEL EQUIPMENT CO.
(ANGLE STEEL STOOL, SALES CO.)
N. Y. & N. J. DISTRIBUTORS
99-189 PARK PLACE
NEW YORK
PHONES BARCLAY 7-[illegible]

FIGURE 840

Popular Sizes—Figures 907, 15 and 840

24″ x 48″	30″ x 60″	36″ x 54″	36″ x 96″
30″ x 48″	30″ x 72″	36″ x 60″	42″ x 72″
30″ x 54″	36″ x 48″	36″ x 72″	42″ x 84″

The three models above can be built in any size required. Truck No. 907 is built with load wheels 12″ x 3″, 15″ x 3″ and 18″ x 3″, and casters 6″ x 2″, 8″ x 3″, and 9″ x 3″.

Truck No. 15 has load wheels 12″ x 2″, 12″ x 3″, 15″ x 2″, 15″ x 3″, 18″ x 2¼″, and 18″ x 3″, and casters 6″ x 2″, 8″ x 3″, 9″ x 3″.

Truck No. 840 has the same load wheels as truck No. 15 and casters 6″ x 1¼″, 6″ x 2″, 9″ x 1¼″, and 9″ x 2½″.

ZERINGS PERFECTION — WORLD'S STANDARD OF QUALITY — HAND PROPELLED VEHICLES

Formerly known as the Zering line. The standard of quality by which all floor trucks have been measured for 30 years.

FIGURE 20

DRY GOODS AND PAPER TRUCK

Figure 20—Standard size of this truck is 28″ x 42″. The standard load wheels are 7″ x 2″, and the casters are 4½″ x 1½″, and the ball bearing swivel type; the overall height is 10″. Can be furnished with one rack only; also with load wheels in rear and two casters in front.

very Load—Every Condi

FIGURE 35
HEAVY BARREL TRUCK

HAMILTON'S STANDARD TWO WHEEL PUSH TRUCKS

Hamilton's two wheel push trucks are unsurpassed for speedy handling of goods in and out of terminals and warehouses and on steamship docks. The best grades of selected oak and hickory are used, and the steel frames are securely riveted and welded to the wooden structure. All Hamilton two wheel push trucks have turned axles; clearly bored wheels and finely polished bearings. From a complete line it is easy to select a model that will readily meet your requirements.

SIZE DATA

Fig. No.	Length	Width Nose	Width Top	Wheels	Weight
30	52″	20″	20″	8½ x 2½″	50
30	56″	22″	22″	9½ x 2¾″	75
31	52″	20″	20″	8½ x 2½″	60
31	56″	22″	22″	9½ x 2¾″	90
31	62″	24″	24″	10½ x 3 ″	125
35	52″	20″	20″	8½ x 2½″	75
35	56″	22″	22″	9½ x 2¾″	90
37	48″	14″	20″	6 x 2 ″	60
40	46″	12″	18″	6 x 2 ″	27
711	67″	17″	22″	12 x 3 ″	125
3955	62″	24″	24″	10½ x 3″	135

Figure 5001—This steel dollie is extensively used for moving heavy machinery, boxes, crates, etc. The heavy duty channel irons are electrically welded to the cross bars, so that the frame is practically unbreakable. This truck is 24″ wide and 50″ long and built with either four or six wheels. Wheel size is 6″ x 4½″.

Figure 525—Straight grain selected hickory used on Hamilton Skids. Ends are carefully covered with heavy iron so that there are no rough projections. Standard lengths are 6, 8, and 12 feet—can be made in any size.

Figure 755—Standard truck for handling heavy rolls of paper, linoleum, screen wire, etc. Made in two standard sizes, 24″ x 36″ and 24″ x 48″. Wheels are 6″ x 2″. Overall height 10″. Special sizes furnished on specification.

Figure 45—A handy little truck for handling various kinds of flat goods, cases, boxes, etc. The center wheels are 4″ diameter and the end wheels 3″ diameter so that the truck may be tilted to put on load. Built in any size required.

FIGURE 30-31
Fig. 30—Half Iron Bound Straps
Fig. 31—Full Iron Bound Straps



FIGURE 37
BAG TRUCK

FIGURE 755
HEAVY ROLL TRUCK

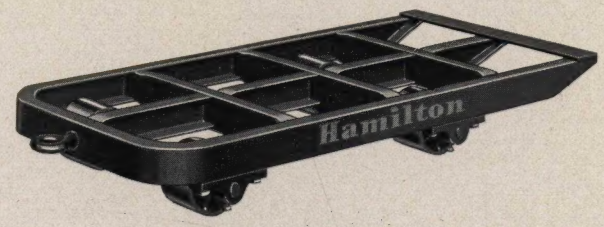

FIGURE 5001
HEAVY STEEL DOLLIE

FIGURE 525—SKID



FIGURE 3955
RAILROAD TRUCK

FIGURE 711
NEW ORLEANS
COTTON TRUCK

FIGURE 40
LIGHT DUTY
TRUCK

FIGURE 45
TILTING BOX TRUCK

RUBBER TIRED, DIVINE CUSHION AND METZGER WOOD WHEELS FURNISHED ON SPECIFICATION

SIX-WHEEL REMOVABLE STAKE TRUCK

Figure 7—The ideal truck for wood working plants, lumber mills, paper goods houses and warehouses. Particularly adapted for use over rough floors, door sills and elevator shafts. Will not tilt even when load is shifted to one corner. Stake pockets are securely bolted to sides. Capacity up to 4,000 pounds. The two load wheels are extra heavy duty type, built with either 2″ or 3″ face and may be equipped with either plain or roller bearings. Casters are end thrust, swivel type. Truck of hard wood construction, with four surfaced sides.

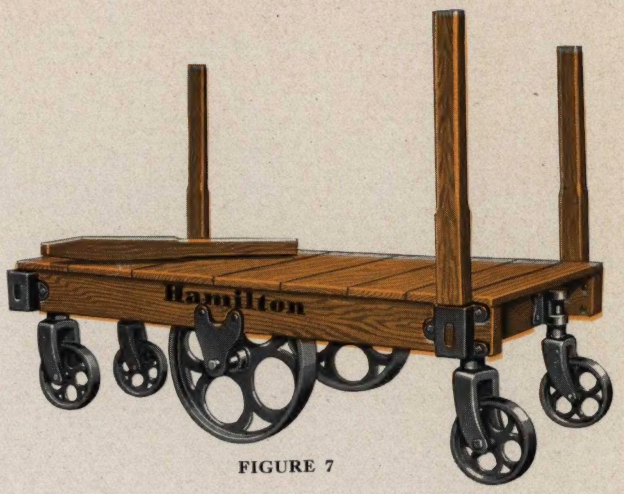

FIGURE 7

BALANCED TYPE REMOVABLE STAKE TRUCK

Figure 805—Practically the same truck as Figure 7 except that it has four wheel running gear arrangement as illustrated in photograph. It moves quickly, operates easily, and is strongly constructed. See schedule below for popular sizes.

Popular Sizes—Figures 7 and 805

26″ x 48″	30″ x 72″	36″ x 72″
30″ x 48″	36″ x 48″	36″ x 84″
30″ x 60″	36″ x 60″	36″ x 96″

Load wheels on these trucks are 12″ x 2″, 16″ x 2″ and 18″ x 3″, 18″ x 3½″. Caster wheels are 6″ x 2″, 7″ x 2″ and 9″ x 2½″. The overall heights: 16″ with 12″ wheel, 17″ with 16″ wheel, 21″ with 18″ wheel.

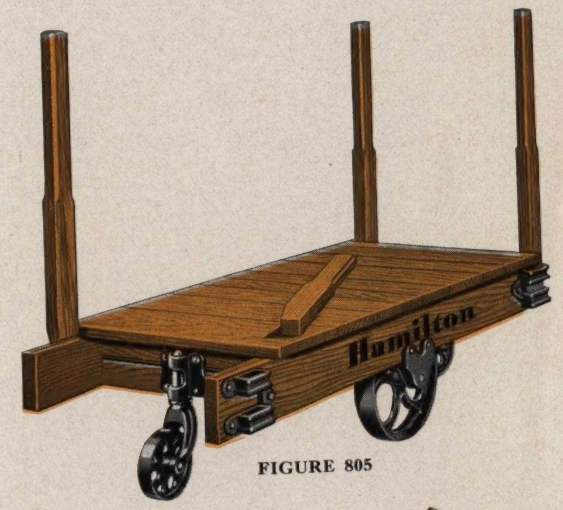

FIGURE 805

WAGON TRUCKS

Figures 545, 430 and 130 illustrate the three standard Hamilton wagon trucks. Figure 545 is a medium duty wagon for handling loads up to 2,500 pounds; Figure 430 for loads from 2,500 to 4,000; and Figure 130 from 5,000 to 8,000 pounds. Complete specifications of the three models are below.

Fig. No.	Platform Size	Height	Front Wheels	Rear Wheels
545	24″ x 36″	12″	9″ x 2½″	9″ x 2½″
545	30″ x 42″	12″	9″ x 2½″	9″ x 2½″
545	36″ x 48″	16″	12″ x 2 ″	12″ x 2 ″
430	36″ x 60″	17″	12″ x 3 ″	12″ x 3 ″
430	36″ x 72″	17″	12″ x 3 ″	12″ x 3 ″
130	36″ x 60″	23″	14″ x 3½″	20″ x 3½″
130	28″ x 96″	23″	14″ x 3½″	20″ x 3½″

FIGURE 545

FIGURE 130

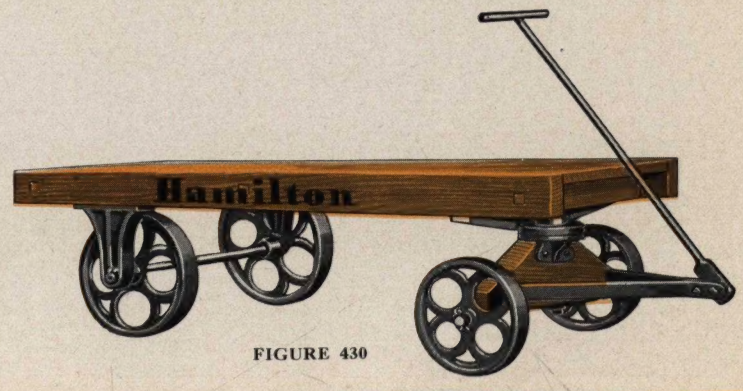

FIGURE 430

Send for Catalog Showing and Listing 1000 Models--Hamilton Trucks

ALL STEEL SHELF AND TRAY TRUCK

Figure 1570—This handy truck is built with either stationary or removable trays. The super-structure is electrically welded and riveted to the frame, so that it will withstand most abusive uses. It can be built in a variety of sizes with any number of shelves—with solid or slatted trays —and with closed ends or sides of sheet steel. Send us your specifications, and we will gladly quote our price.

FIGURE 1570

WOOD SHELF AND TRAY TRUCK

Figure 450—Widely used for handling small parts of different sizes in machine shops. Shelves are rigidly supported by wood uprights, and can be placed in any position needed. Finished with either balanced type or six wheel running gear arrangement. Give us length, width, height and number of shelves, and we will quote you at once.

BOX TRUCK

Figure 700—A convenient truck for handling large quantities of small commodities. It is made of hard wood, and the sides are tightly bound together with cross rods. Load wheels are extra heavy duty type and end wheels are swivel type permitting fast and easy movement. Removable ends furnished on specification. Two standard sizes are 20″ x 42″ x 18″ deep, and 24″ x 48″ x 24″ deep.

FIGURE 450

GET A COMPLETE CATALOG

Write for a copy of our general Catalog, which illustrates and describes over 1,000 standard Hamilton trucks, and also the complete line of Hamilton casters. Regardless of your loads or conditions, there is a Hamilton truck and caster that will exactly meet your requirements. Tell us about your special materials handling problem, and our engineers will be glad to work out the proper solution. We will gladly figure on any special truck, whether it be wood or steel.

Please address all communications to
NEW YORK CITY OFFICE

THE HAMILTON CASTER & MANUFACTURING CO.
HAMILTON, OHIO

FIGURE 700

Hamilton

CASTERS **TRUCKS**

THE WORLD'S LARGEST CASTER AND TRUCK SPECIALISTS

ROLNICK STEEL EQUIPMENT CO.
(ANGLE STEEL STOOL SALES CO.)
N. Y. & N. J. DISTRIBUTORS
98-100 PARK PLACE
NEW YORK
PHONES BARCLAY 7-

HAMILTON CASTERS

SPECIFIED WHERE THE BEST IS DEMANDED

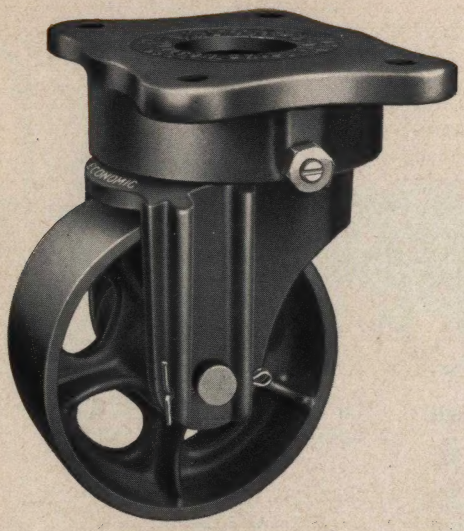

ECONOMIC

(Patented)

Strongest, most durable and easiest swivelling type caster made. Friction reduced to minimum by use of roller bearings. Capacity 3,000 to 10,000 pounds per set of four casters.



KALBER

(Patented)

A twin wheel type caster providing exceptional swivel action with a minimum of friction. One shot from Alemite grease gun thoroughly lubricates entire caster.

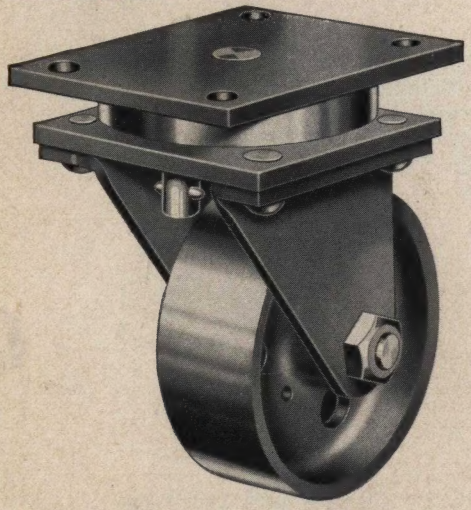

HAMILTON HEAVY DUTY

Outstanding for its ability to withstand punishment. It is compact and strong. Over size bearing, with hardened ball race. Hexagon castellated nut adjustment standard. Capacity 1,500 to 4,000 pounds per set of four casters.

Hamilton Casters enjoy an enviable position wherever used, because by actual test they give longer and more dependable service than any other caster built. Even under the most severe conditions, they stand up and render safe and economical movement of goods.

Evidence of their unfailing performance and lasting service is expressed in the many repeat orders received from such concerns as Ford Motor Car Company, American Tobacco Company, National Candy Company, H. J. Heinz, Fisher Body Company, Endicott-Johnson Company, Westinghouse, Stewart Warner, and hundreds of others who use Hamilton Casters for all types of work.

The Hamilton line includes casters for every industrial need—casters that have been especially designed for every industrial requirement. The materials used are the best that money can buy, and the best grade of workmanship is used to produce the finished product.

The casters shown on this page are just a few of the many standard types. If you require special design our engineering department will be glad to assist you without obligation.

Send for a copy of our new folder which describes in detail the popular Hamilton types.

Please address all communications to
NEW YORK CITY OFFICE

THE HAMILTON CASTER & MANUFACTURING CO.

HAMILTON, OHIO

Hamilton

CASTERS TRUCKS

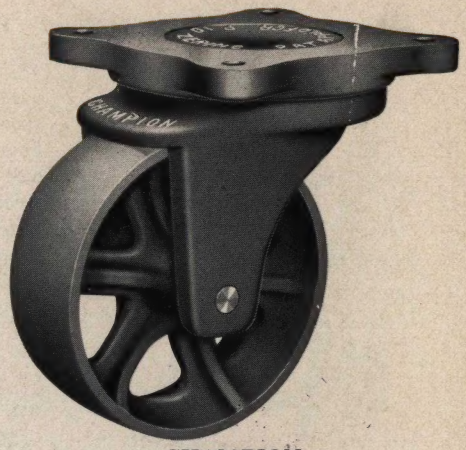

CHAMPION

Greatest flexibility provided through double ball race. Can be furnished in gray iron, malleable or all steel. Capacity 5,000 to 12,000 pounds per set of four casters.

STEM BRACKET

A very popular Hamilton Caster; provides great freedom and easy steer under heavy loads. There is no cramping or binding.

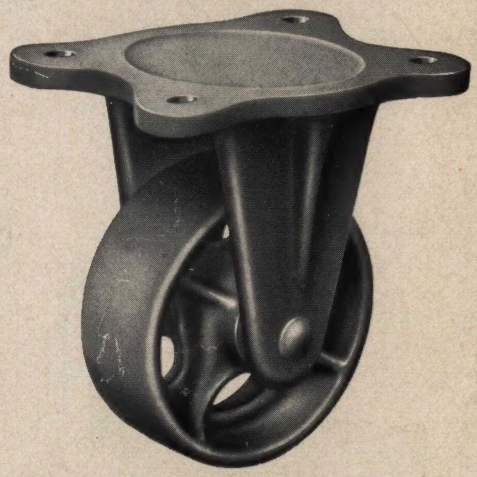

RIGID

Hamilton Rigid Casters match other Hamilton swivel types. Properly designed and well proportioned, and of sturdy construction. Furnished with plate having 3, 4 or 5 bolt holes.

ROLNICK STEEL EQUIPMENT CO.
(ANGLE STEEL STOOL SALES CO.)
N. Y. & N. J. DISTRIBUTORS
98-100 PARK PLACE
NEW YORK
PHONES BARCLAY 7-5559--60

PUT IT ON WHEELS AND KEEP IT MOVING